



LOC	DIST	P	F	REVISIONS					
				ZONE	LTR	DESCRIPTION	DATE	APPO	
DF	X0				0	RELEASED PER NPR#0600-2036-94	4-25-94	BY RLF	

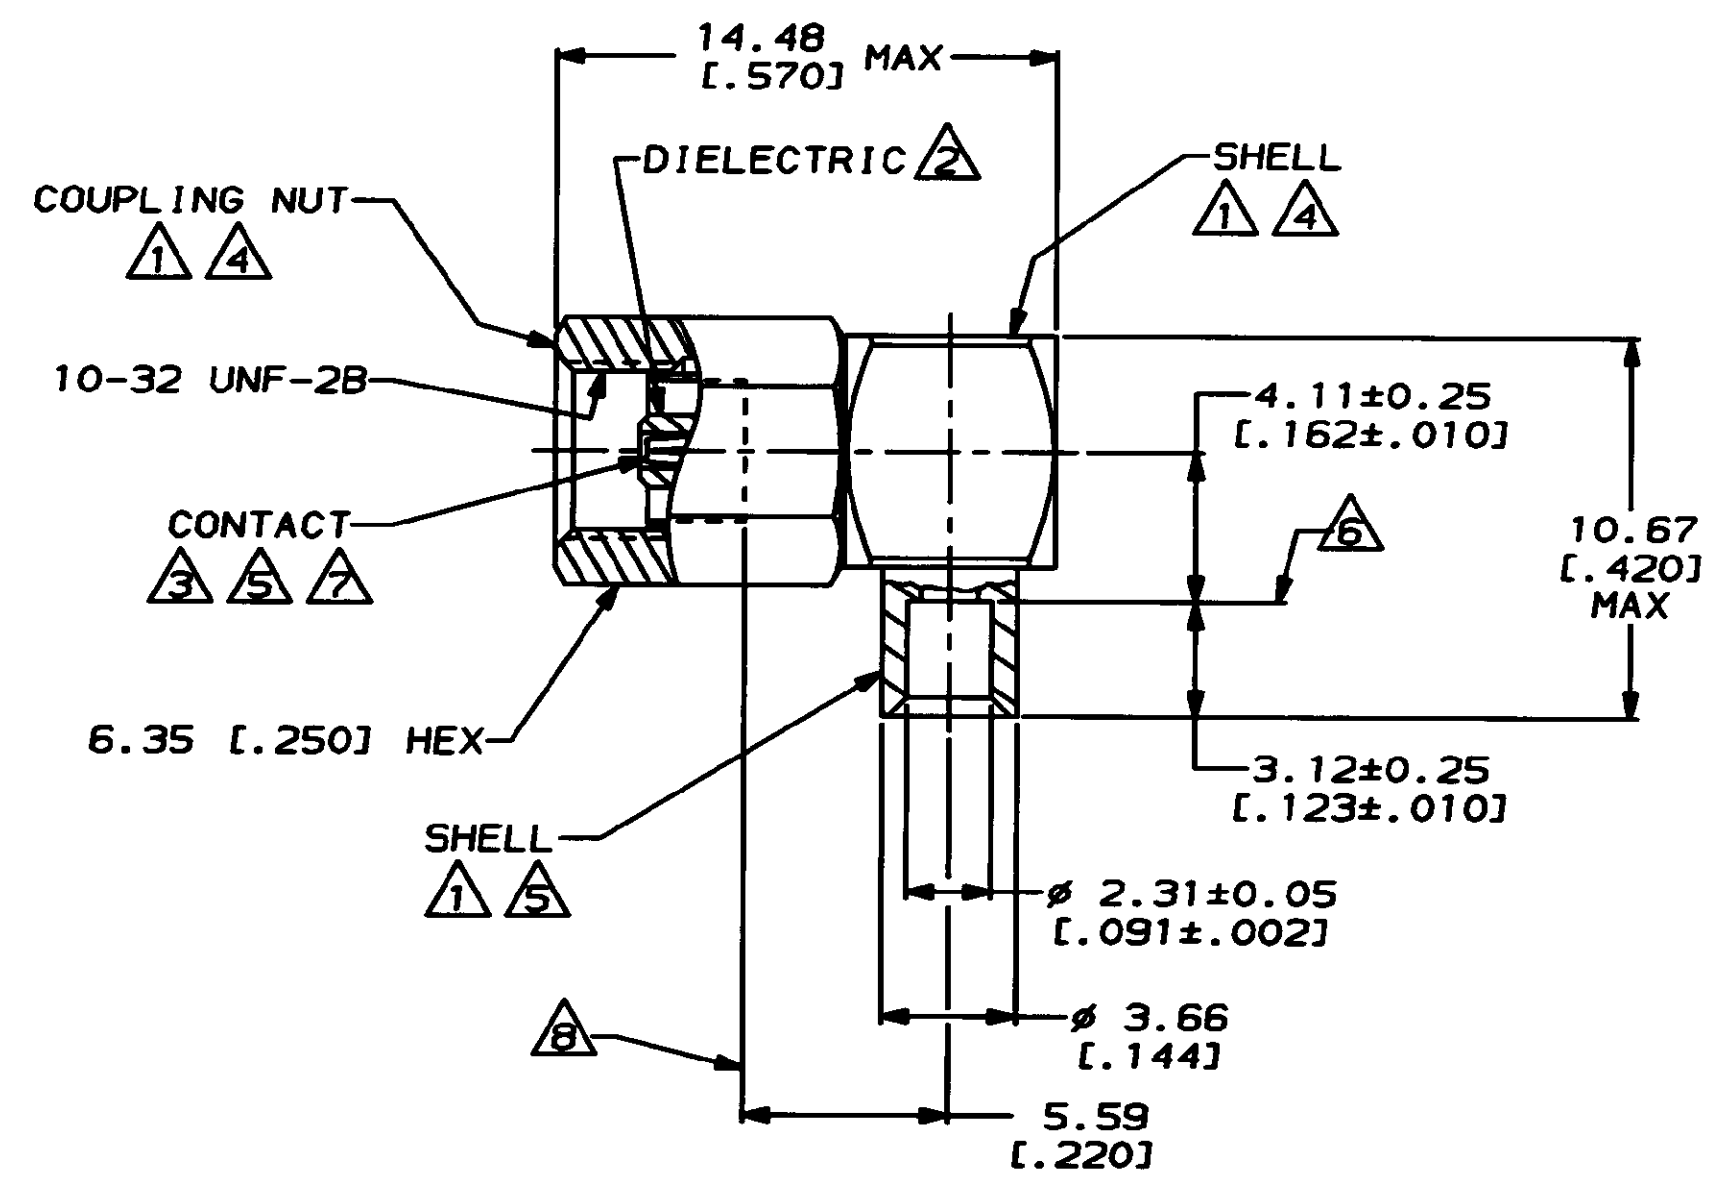

- 1 BRASS PER QQ-B-626
- 2 PTFE PER ASTM-D-1710.
- 3 BERYLLIUM COPPER PER QQ-C-530 CONDITION H
- 4 NICKEL PLATE PER QQ-N-290 0.00254 [0.000100] MIN THK
- 5 GOLD PLATE PER MIL-G-45204 0.00127 [0.000050] IN THK
- 6 CABLE/CONNECTOR INTERFACE
- 7 SMC FEMALE PER MIL-C-39012
- 8 REFERENCE PLANE PER MIL-C-39012

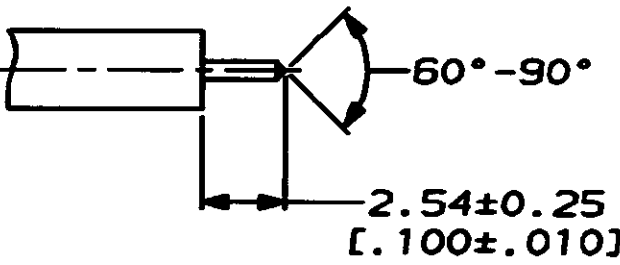

RECOMMENDED STRIP LENGTH

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PLC DEC ± 0.13 (0.005) 3 PLC DEC ± - ANGLES ± -	DR 4-22-94 Brent D. Yohn
	CHK 4-25-94 R.L. FISHER JR
MATERIAL 1 THRU 3	APPO 4-25-94 R.L. FISHER JR
	APPO 4-25-94 B.D. YOUNG
FINISH 4 5	PRODUCT SPEC -
	APPLICATION SPEC -
	WEIGHT -

449535-1		
PART NUMBER		
AMP AMP Incorporated Harrisburg, PA 17105-3608		
NAME PLUG, RIGHT ANGLE, SMC SOLDER, ONE-STEP		
SIZE B	CAGE CODE 00779	DRAWING NO C-449535
SCALE 5:1	SHEET 1 OF 1	