



PUSHBUTTON SWITCHES

Series—A20000 Momentary Snap Action
J20000 Push-Push (Alternate) Action


Illuminated Switches

FEATURES	SPECIFICATIONS	CURRENT RATINGS					
		Part Number	Number of Poles	Type of Operation	28VDC		
					Resistive	Inductive	Lamp
- Moisture resistant - Flame retardant back material - Low operating force - Independent lamp circuit - Rugged case - A20000 Series momentary snap action - J20000 Series alternate action	- Watertight enclosure design level 3 - MIL-S-8805 - Temperature range: -67°F to +185°F (-55°C to +85°C) - Operating force: 2 ± 1 lb (8.88N) - Plunger travel: 0.160 in. (4.06mm) approx. - Uses either M22885/19 screw type or M22885/1snapintypelenses	J20000	2	Alternate	2	1.5	0.5
		A20000	2	Momentary	2	1.5	0.5

PUSHBUTTON
SWITCHES

SELECTION TABLE

APPROXIMATE DIMENSIONS




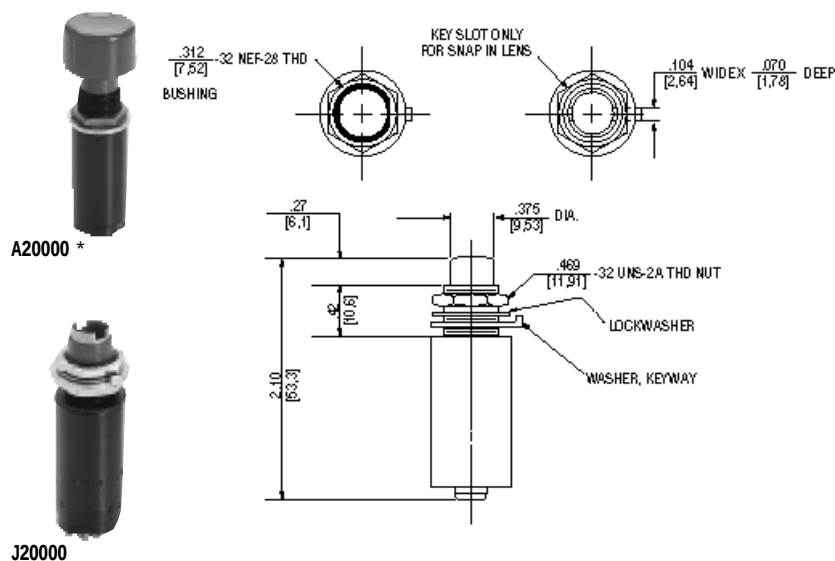


Catalog Number	Circuit	Lens Type	Detail Spec. Sheet
Alternate Action			
J20145	2 P.D.T.	Screw-in	M22885/18-02
J20149	2 Circuit		-04
J20152	2 P.D.T.	Snap-in	M22885/18-06
J20153	2 Circuit		-08
Momentary Action			
A20267	2 P.D.T.	Screw-in	M22885/18-01
A20271	2 Circuit		-03
A20272	2 P.D.T.	Snap-in	M22885/18-05
A20273	2 Circuit		-07

Note: Catalog number does not include lens shown above.

SCHEMATIC DIAGRAMS—A20000 AND J20000

RECOMMENDED PANEL MOUNTING HOLE DIMENSIONS



STANDARD
0.00 = inches
[0,0] = mm

Dimensions for reference only.