


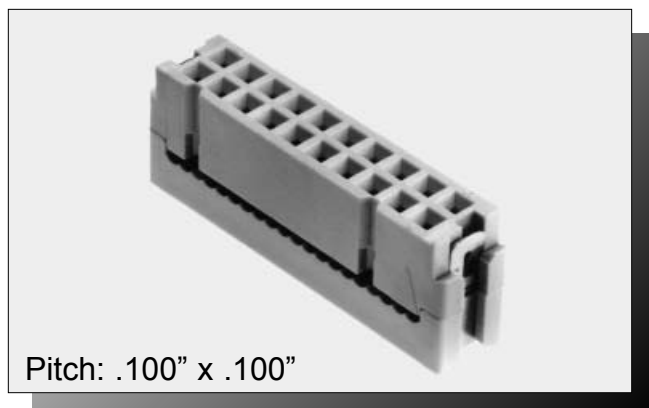

INSULATION DISPLACEMENT SOCKET

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, gray, UL94V-0

Contact Material: Phosphor Bronze

Contact Plating: See options below

Terminates To: .050" cable, 28 AWG

ELECTRICAL


Current Rating: 1 AMP

Consult factory for additional options

CA- POSITION IDS2- PLATING - POLARIZATION

POSITION		PLATING	POLARIZATION
06	26	F= 30μ gold	Blank = No polarization
10	34		SPT = Polarization tab
14	40		
16	50		
20			

DIMENSIONS		
Position	A	B
06	.480 [12.19]	.200 [5.08]
10	.680 [17.27]	.400 [10.16]
14	.880 [22.35]	.600 [15.24]
16	.980 [24.89]	.700 [17.78]
20	1.180 [29.97]	.900 [22.86]
26	1.480 [37.59]	1.200 [30.48]
34	1.880 [47.75]	1.600 [40.64]
40	2.180 [55.37]	1.900 [48.26]
50	2.680 [68.07]	2.400 [60.96]

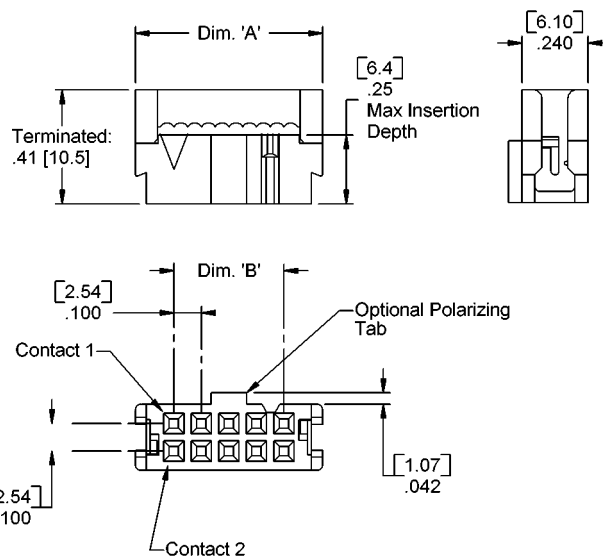

CA-SRXXIDS2
Strain Relief
Ordered separately



Socket Key
CA-IDSK

Mating Product: H Series, IDHB, DXX, DXXR strip header
Drawing Number CA-610034



For more information please contact our customer service department or visit our website at circuitassembly.com

Circuit Assembly Worldwide Hqtrs. 18 Thomas Street, Irvine, CA 92618-2777 USA Tel 1-949-855-7887 Fax 1-949-855-4298

Circuit Assembly Asia Hqtrs. 2F, No. 10 Lane 24, Ho Ping Rd., Pan Chiao City, Taipei Hsien, Taiwan Tel +886 2-2951-9916 Fax +886 2-2954-9126