



P.C.B. RIGHT ANGLE D-SUB CONNECTORS


.318 FOOTPRINT

CENTURY INTERCONNECT PRODUCTS (203) 362-1371 FAX (203) 362-1375

ORDERING INFORMATION

C1DA 25 P 1 A _ _
1 2 3 4 5 6 7

- 1... **Series** C1DA .318 footprint
right angle D-sub connector
- 2... **Number of Contacts**
09, 15, 25, 37
- 3... **Contact Type**
P... Plug
S... Socket
- 4... **Metal Shell Finish**
1... Tin plated shell, grounding
indents on plug only
- 5... **Mounting Options**
See page A-3
- 6... **Plating Options**
Blank... selective gold flash
15... 15μ" selective gold
30... 30μ" selective gold
- 7... **Ferrite Option**
Blank... ferrite not required
F... Ferrite required




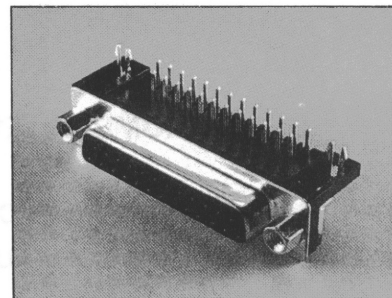


SHELL SIZE	A ± .010 ± 0.25	B ± .005 ± 0.13	C ± .015 ± 0.38
9 (E)	0.643 16.33	0.984 24.99	1.213 30.81
15 (A)	0.971 24.66	1.312 33.32	1.541 39.14
25 (B)	1.511 38.38	1.852 47.04	2.088 53.04
37 (C)	2.159 54.84	2.500 63.50	2.729 69.32

Consult factory for high temperature insulator version.

FERRITE SPECIFICATIONS

MEASUREMENT	TEST FREQUENCY
20 ohms min.	30 MHz
30 ohms min.	50 MHz
50 ohms min.	100 MHz.

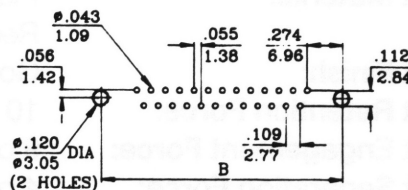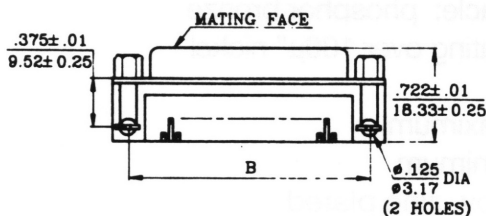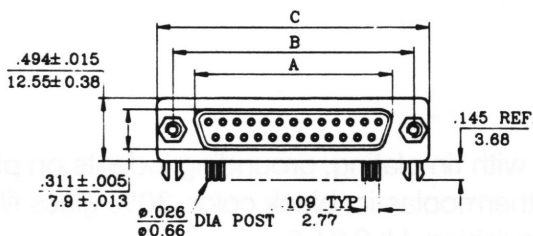

PCB LAYOUT