

C&K CR Series Round Single Pole Specialty Rocker Switches

Features/Benefits

- ***Round actuator and body***
- ***Nice styling***
- ***Multiple illuminated versions available***
- ***IP65 splash proof rubber boot option***

Typical Applications

- ***Appliances, small and large***
- ***Office equipment***
- ***Computers and peripherals***
- ***Audio/Video equipment***
- ***RoHS compliant***



Specifications

CONTACT RATING:

UL: 16 AMPS @ 125 VAC, 10 AMPS @ 250 VAC.

VDE μ T85: 16 AMPS @ 125 VAC, 10 AMPS @ 250 VAC.

ELECTRICAL LIFE: 10,000 make and break cycles at full load.

INSULATION RESISTANCE: $10^8 \Omega \text{ min.}$

DIELECTRIC STRENGTH: 1.500 VRMS @ sea level.

OPERATING TEMPERATURE: -20°C to + 85°C

Materials

HOUSING AND ACTUATOR: 6/6 nylon (UL94V-2), matte finish.

ILLUMINATED ACTUATOR: Polycarbonate, matte finish.

CENTER CONTACTS: Silver plated, copper alloy.

END CONTACTS: Silver plated $\text{AgSnO}_2\text{InO}_3$.


ALL TERMINALS: Silver plated, copper alloy.

NOTE: For the latest information regarding RoHS compliance, please go to: www.ittcannon.com/rohs.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages H-83 through H-86. For additional options not shown in catalog, consult Customer Service Center.

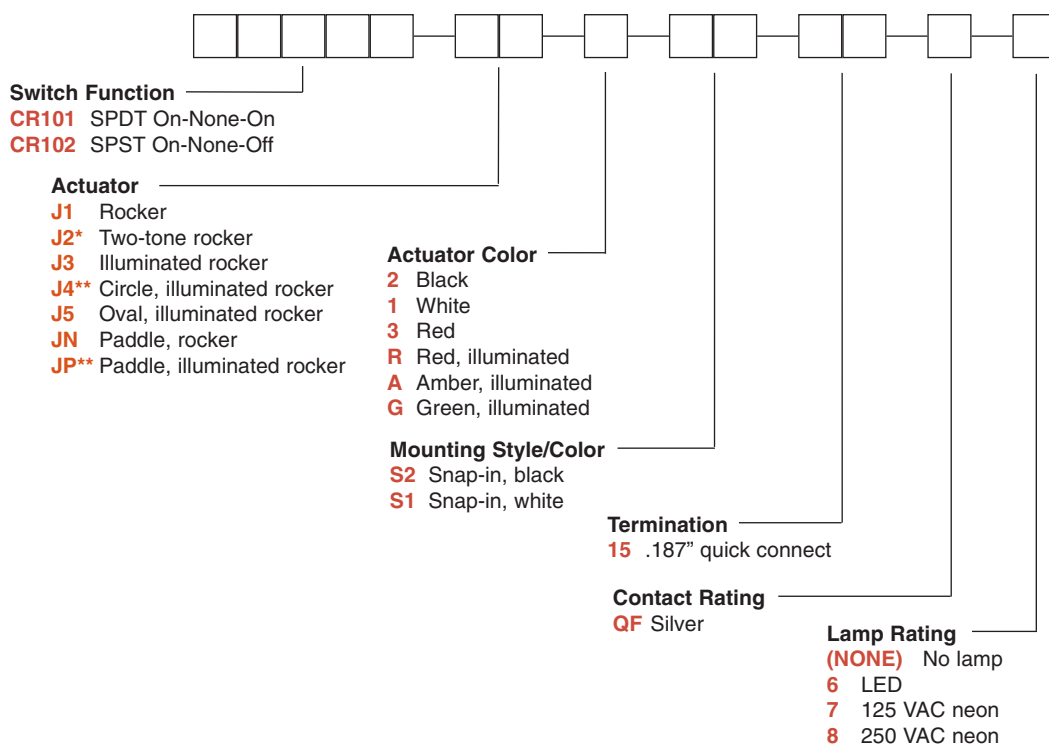

* Refer to table on page 85 for actuator options.

** VDE rating for JP: 10 A @ 125 VAC / 6 A at 250 VAC.


Rocker




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

C&K CR Series Round Single Pole Specialty Rocker Switches


SWITCH FUNCTION 

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC
								
	CR101	ON	NONE	ON				
SP	CR102	ON	NONE	OFF	2-3	N/A	2-1	 OR For 7 & 8 Illuminated Versions 

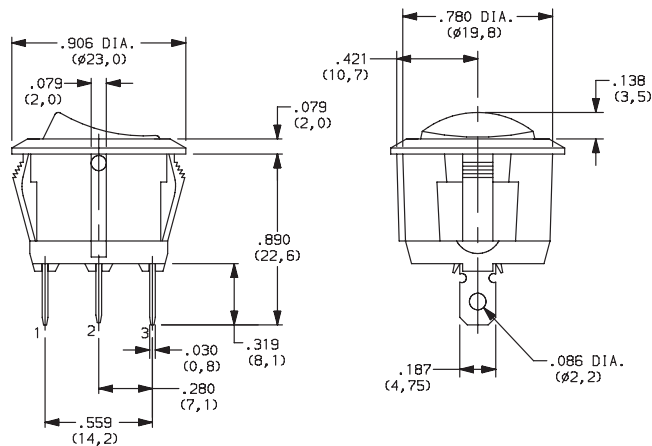


ACTUATOR 


J1 ROCKER
J3 ILLUMINATED ROCKER

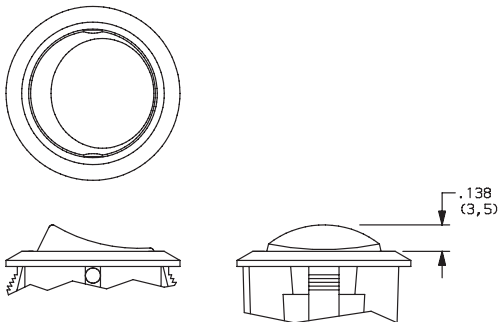

J2 TWO-TONE ROCKER

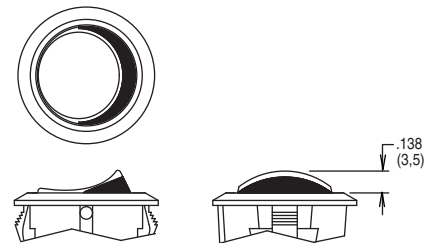

NOTE: J3 actuator available with 7 & 8 lamp ratings and CR102 switch function only.




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

www.ittcannon.com





Round Single Pole Specialty Rocker Switches





$\sqrt{}$.138
(3,5)

NOTE: Available with CR102 switch function and 7 & 8 lamp ratings only.



↓ .138
(3,5)

NOTE: Available with CR102 switch function and 6 lamp rating only.



.610
(15,5)



NOTE: JP actuator available with CR102 switch function and 7 & 8 lamp ratings only.

OPTION CODE	ACTUATOR COLOR
2	BLACK
1	WHITE
3	RED
R	RED, ILLUMINATED
A	AMBER, ILLUMINATED
G	GREEN, ILLUMINATED


OPTION CODE	ACTUATOR COLOR	
	TOP	BOTTOM
1	WHITE	RED
2	WHITE	BLACK
3	RED	WHITE
4	BLACK	WHITE
5	BLACK	RED

J2 actuator only

S1 SNAP-IN, WHITE

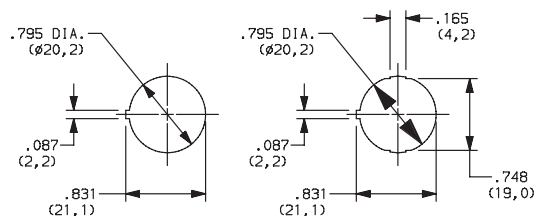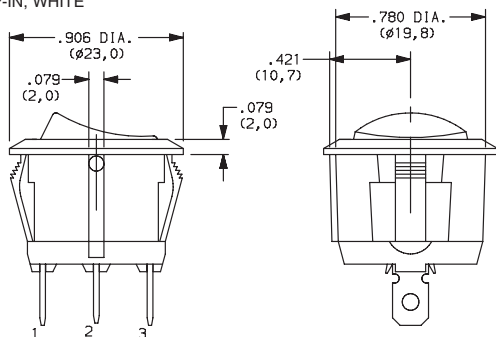

PANEL MOUNTING




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

C&K CR Series Round Single Pole Specialty Rocker Switches

TERMINATION

15 .187" QUICK CONNECT

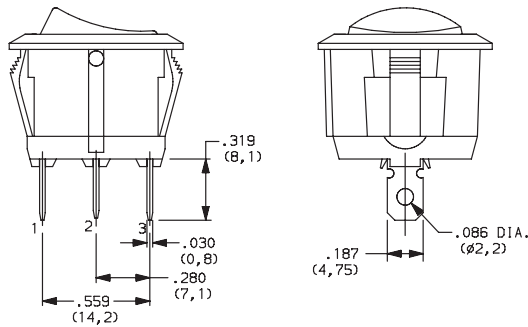

CONTACT MATERIAL

OPTION CODE	RoHS COMPLIANT *	RoHS COMPATIBLE *	CONTACT AND TERMINAL MATERIAL	RATINGS	
QF	YES	YES	SILVER	POWER	16 AMPS @ 125 VAC; 10 AMPS @ 250 VAC 

* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

LAMP RATING

(NONE) NO LAMP

6 LED RATING @ 10 mA $V_f=1.85V$


7 125 VAC 33k Ω NEON

8 250 VAC 150k Ω NEON

NOTE: Lamp rating for J3 actuator option.

ACCESSORIES

377C00000 IP65 SPLASH PROOF RUBBER BOOT

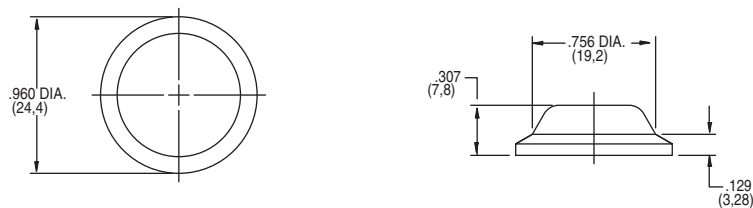

Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

