

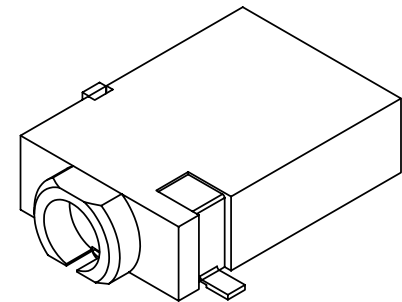
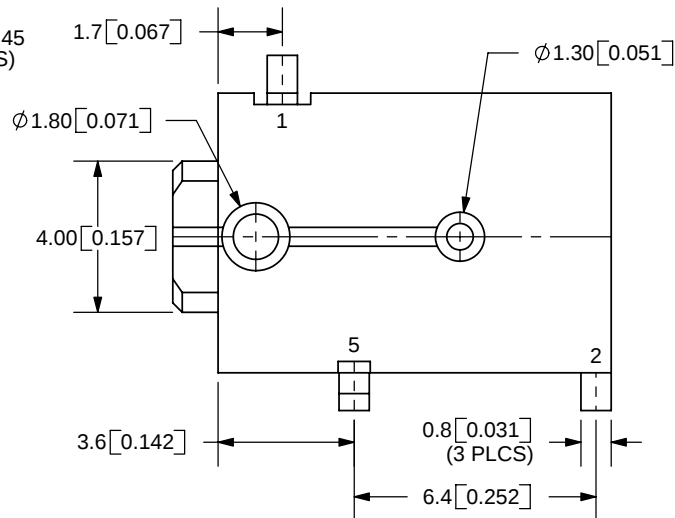
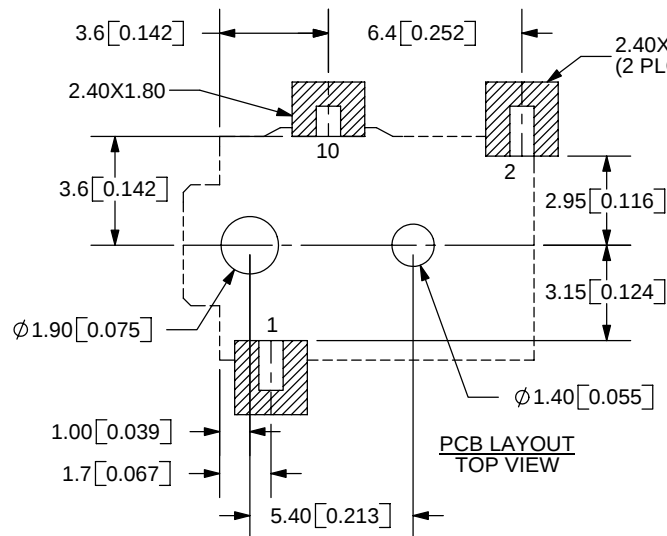


REV.	DESCRIPTION	DATE
A	NEW DRAWING	4/11/2006

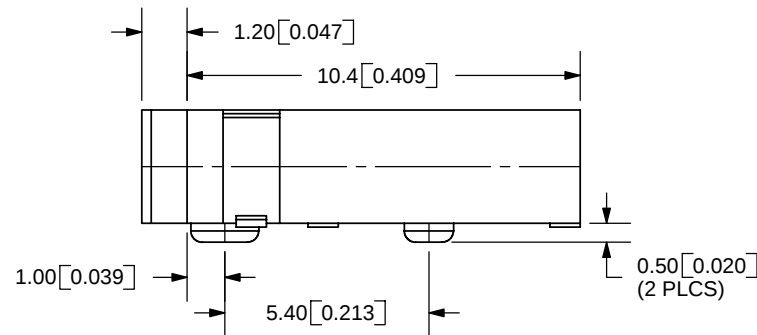

TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm

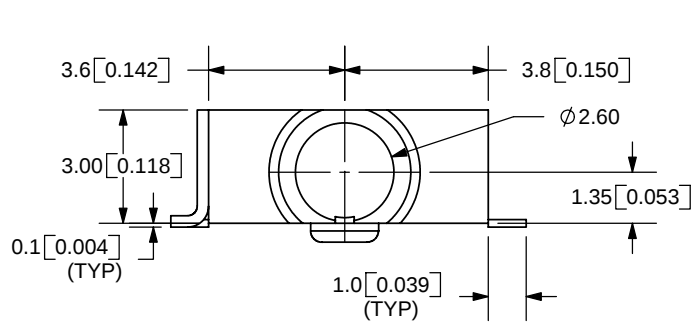

MODEL NO.	MJ1-2533-SMT
SCHEMATIC	

SPECIFICATIONS:
RATING: 16V DC @ 300mA
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

	MATERIAL	PLATING	TITLE: SURFACE MOUNT JACK - MONO		REV: A
TERMINAL 1	Copper Alloy	Gold	PART NO. MJ1-2533-SMT		UNITS: MM [INCHES]
TERMINAL 2	Copper Alloy	Gold			
TERMINAL 5	Brass	Gold	DRAWN BY: ZRJ		APPROVED BY:
HOUSING	PBT				
					SCALE: 4:1



CUI INC

9615 SW Allen Blvd., Ste. 103
Beaverton, OR 97005
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

PC FILE NAME:
MJ1-2533-SMT

COPYRIGHT 2006 BY CUI INC.