
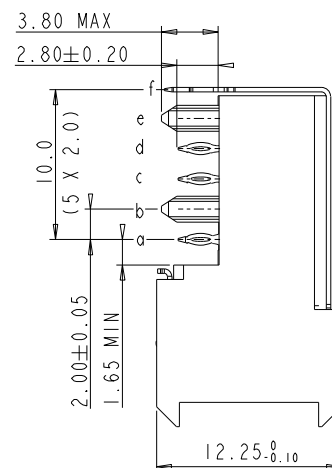
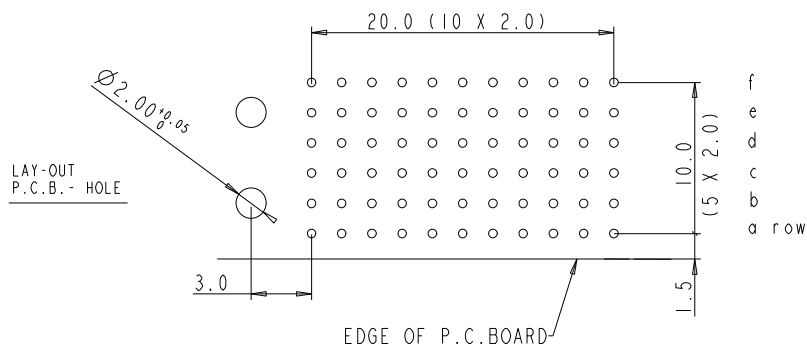
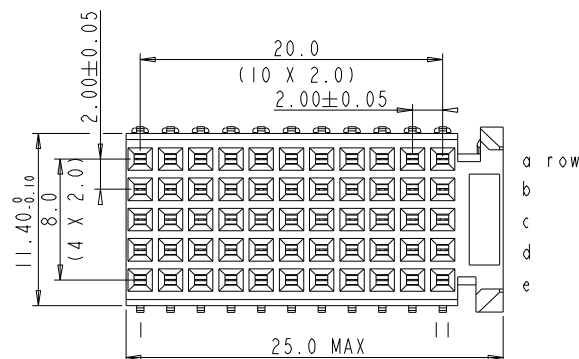


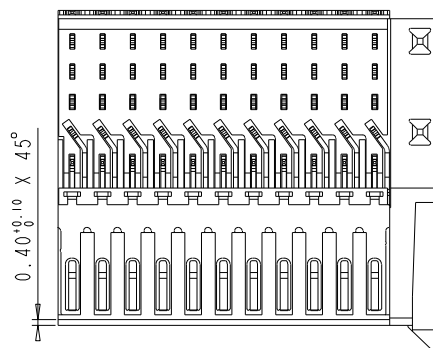

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 mΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
PERFORMANCE LEVEL INDICATION (REF DWG NO.BSC .201844.003)
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 05	KN	14-09-01
B	105-0085	ALEX B	02-06-05
C	DG05-0278	Kason	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-
05	BEC 9.3546	R.M	110601

Material			Spec ref			
Mat code			✓	tolerance IDEC ± 0.2 IDEC 2DEC ± 0.1 2DEC ANGLES ± 1° HOEKEN		
Heattreat						
Plating/Finish						
Dr	W. Panis	07-04-92	projection			
Eng			size A4	Scale 2.000		
Chr						
Appr			Model Name			
			ECN DG05-0278			
			Model Revision			
			REL Level			
A FCI	title	MPACS 5+2R RA RCP CONN TYPE C			dwg no BSC201444003	Rev C
Pro/E file	catalog	HM2R3PA5101----	CUSTOMER DRAWING		sheet 1 of 1	