
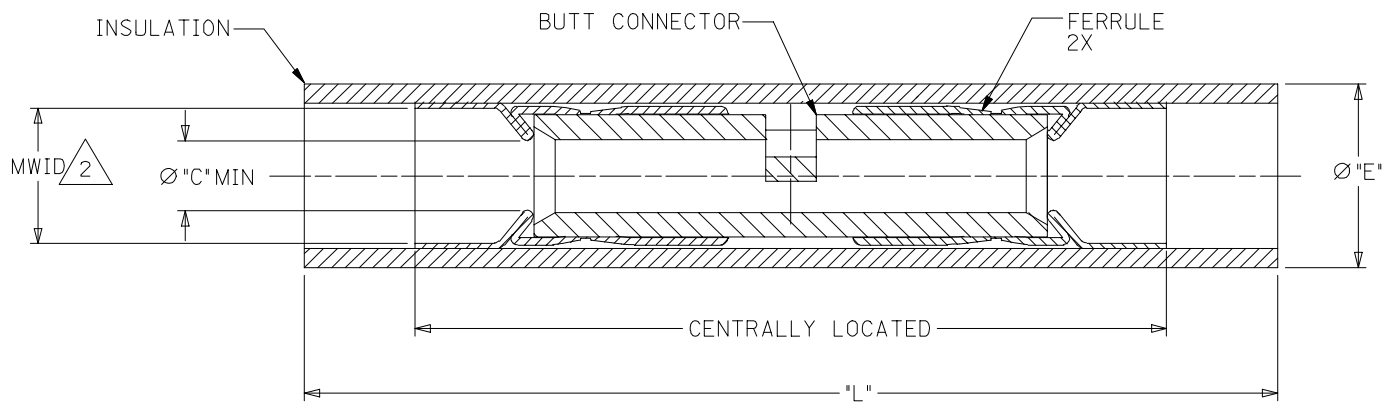


	10	9	8	7	6	5	4	3	2	19200
	MATERIAL NUMBER	ENGINEERING NUMBER	WIRE SIZE	INSULATION COLOR	MWID $\triangle 2$	"C"	"E" MAX	"L" MAX	PACKAGING	
F	I92000002	AS-845	22-18	RED	$\varnothing .138/3.50$	$\varnothing .056/1.42$	$\varnothing .20/5.1$	1.25/31.75	LOOSE PC	
	I92000014	AS-845SD100							100	
	I92000011	AS-845SD5000							5000	
	I92000001	BS-831							LOOSE PC	
E	I92000013	BS-83ISD100	16-14	BLUE	$\varnothing .169/4.29$	$\varnothing .086/2.18$	$\varnothing .23/5.8$	1.25/31.75	100	
	I92000010	BS-83ISD5000							5000	
	I92000003	CS-846							LOOSE PC	
	I92000015	CS-846SD50							50	
E	I92000012	CS-846SD2500	12-10	YELLOW	$\varnothing .230/5.84$	$\varnothing .138/3.50$	$\varnothing .30/7.6$	1.61/40.89	2500	
	I92000022	AS-845T							PART ON TAPE	

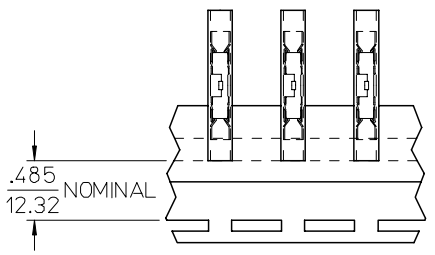

- NOTES:
- 1. MATERIAL;
INSULATION: NYLON
FERRULE: TIN PLATED BRASS.
 - ② BUTT CONNECTOR: TIN PLATED COPPER.
 - ② MWID = MAXIMUM WIRE INSULATION DIAMETER.
 - ③ ASSEMBLY IS ROHS COMPLIANT.

REDRAWN & REVISED EC NO: ETC2007-0394 DRW: NEHLE 2007/04/20 CHKD: JMACNEIL 2007/04/27 APPR: JMACNEIL 2007/04/30	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
			mm	INCH	DRAWN BY BRE	DATE 2002/03/22	TITLE BUTT SPLICE, SEAMLESS, AVIKRIMP, SUPERDUTY		
			4 PLACES ± ---	± ---	CHECKED BY HEB	DATE 2002/03/22			
			3 PLACES ± ---	± .005	APPROVED BY RWD	DATE 2002/03/22			
			2 PLACES ± 0.13	± .01	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-19200-001	SHEET NO. 1 OF 1	
			1 PLACE ± 0.25	± ---	ANGULAR ± 1/2°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
REV	D		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						