


Mechanical

LGA/BGA CPU Socket
LGA SMT Type
1.09X1.17mm [.043 X.046"] Pitch
771 Pos.

Final Averaged Contact Resistance
(average of minimum 12pin/chian): 15.2 mΩ max.
Final Max. Chain Contact Resistance: 28 mΩ max.
Insulation Resistance: 800mΩ min.
Dielectric Withstanding Voltage: 360 V RMS min.

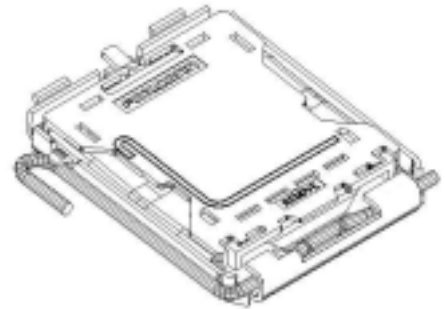

Socket Body: Thermoplastic, UL 94V-0 rated, Black Color
PnP Cap: Thermoplastic, UL 94V-0 rated, Black Color
Load Plate: Stainless Steel
Stiffener: Stainless Steel
Load Lever: Stainless Steel
Contact: Copper Alloy
Plating: See "ORDERING INFORMATION"

[illegible]

PRODUCT NO.: P E 0771 0 7- 10 4 1- 0 1

Pick Up Cap Design
1=Removal Table Is Flat
Package
0=Hard Tray
Material Of Contact
1=Copper Alloy
Material / Color Of Insulation
4=Thermoplastic Black