



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANCON.

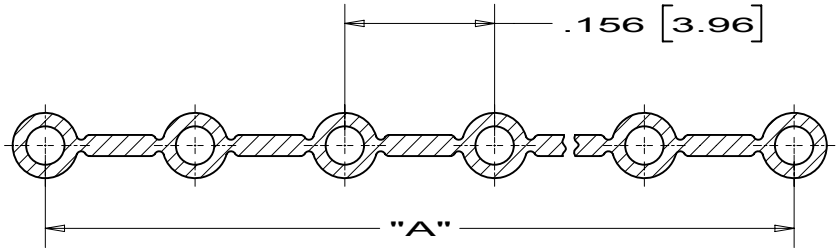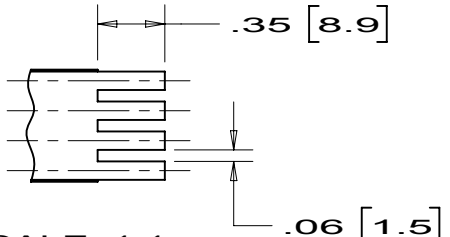

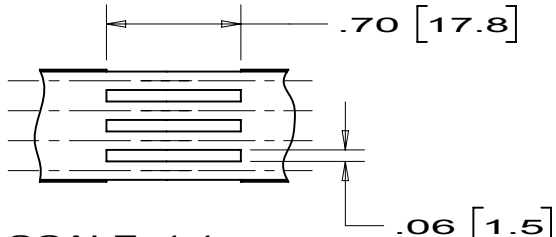

OPTIONAL END PROFILE
ONE OR BOTH SIDES

RECOMMENDED NOTCHING AS PROVIDED BY NOTCHING TOOL P/N CPD24-156C	END TERMINATION	THROUGH TERMINATION
	 SCALE: 1:1	 SCALE: 1:1

RoHS Compliant

REV	DATE	BY	CHK	DESCRIPTION	CN - R	CUST	SUP
10		KI		A Added "TR" pack code	2215		
9		KI		Added RoHS Compliant	2162		

PANCON CONNECTORS
www.pancon.de / GERMANY
www.panconconnectors.com / USA

Bolingbrook, Illinois

PANFLEX™, .156" CENTERLINE FLAT CABLE

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ± .005[.13]
(.XX) ± .01[.25] ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION.

DRAWN BY: JEP
MAT'L: SEE NOTES
SCALE: 5 : 1
DATE: 5-3-88
CHK'D: WJH
DRAWING NO.: KA-10116 SHT 1 OF 2
DWG. SIZE: A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANCON.

PART NUMBER

1 5 6 F 2 0 V 8 C R

- CONDUCTOR SIZE (AWG) 18,20,22
- No. OF CONDUCTORS (SEE CHART)
- PACKAGE CODE
  - CR=100'±1' (2-24 CONDUCTOR)
  - DR=500'±3' (2-4 CONDUCTOR)
  - (A) TR=200'±2' (2-12 CONDUCTOR)

No. OF CONDUCTORS	DIM "A" (INCHES)	DIM "A" (MILLIMETERS)
2	.156 ±.005	3.96 ±.13
3	.312 ±.007	7.92 ±.18
4	.468 ±.007	11.89 ±.18
5	.624 ±.007	15.85 ±.18
6	.780 ±.007	19.81 ±.18
7	.936 ±.011	23.77 ±.28
8	1.092 ±.011	27.74 ±.28
9	1.248 ±.011	31.70 ±.28
10	1.404 ±.011	35.66 ±.28
11	1.560 ±.011	39.62 ±.28
12	1.716 ±.015	43.59 ±.38
13	1.872 ±.015	47.55 ±.38
14	2.028 ±.015	51.51 ±.38
15	2.184 ±.015	55.47 ±.38
16	2.340 ±.015	59.44 ±.38
17	2.496 ±.015	63.40 ±.38
18	2.652 ±.015	67.36 ±.38
19	2.808 ±.015	71.32 ±.38
20	2.964 ±.015	75.29 ±.38
21	3.120 ±.015	79.25 ±.38
22	3.276 ±.015	83.21 ±.38
23	3.432 ±.015	87.17 ±.38
24	3.588 ±.015	91.14 ±.38

NOTES:

1. FLAT CABLE MEETS U.L. STYLE No. 2651 SPECS.
2. INSULATION: GREY PVC
3. CONDUCTOR: INDIVIDUALLY TINNED ANNEALED COPPER PER ASTM B33, 19 STRAND 18 AWG, 7 STRAND 20 OR 22 AWG
4. TEMPERATURE RATING: 105°C
5. VOLTAGE RATING: 300 VOLTS
6. PACKAGED ON REELS, SEE PACKAGE CODE FOR LENGTH. A MAXIMUM OF 2 SPLICES WITH A MINIMUM OF 20 FEET BETWEEN SPLICES.
7. PERFORMANCE PER U.L. 62 STANDARD
8. FLAMMABILITY RATING U.L. RATED VW-1
9. ALL DIM. IN INCHES AND [MILLIMETERS]

RoHS Compliant

REV	DATE	BY	CHK	DESCRIPTION	CN - R	CUST	SUP	
10		KI		See Sh. 1	2215			
9		KI		See Sh. 1	2162			

PANCON CONNECTORS
www.pancon.de / GERMANY
www.panconconnectors.com / USA

Bolingbrook, Illinois

PANFLEX™, .156" CENTERLINE FLAT CABLE

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ± .005[.13]
(.XX) ± .01[.25] ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION.

DRAWN BY: JEP
DATE: 5-3-88
CHK'D: WJH
MAT'L: SEE NOTES
SCALE: 5 : 1
DRAWING NO.: KA-10116 SHT 2 OF 2
DWG. SIZE: A