
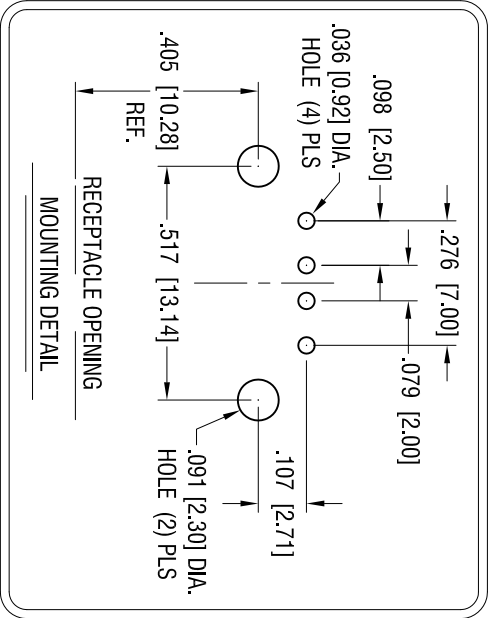
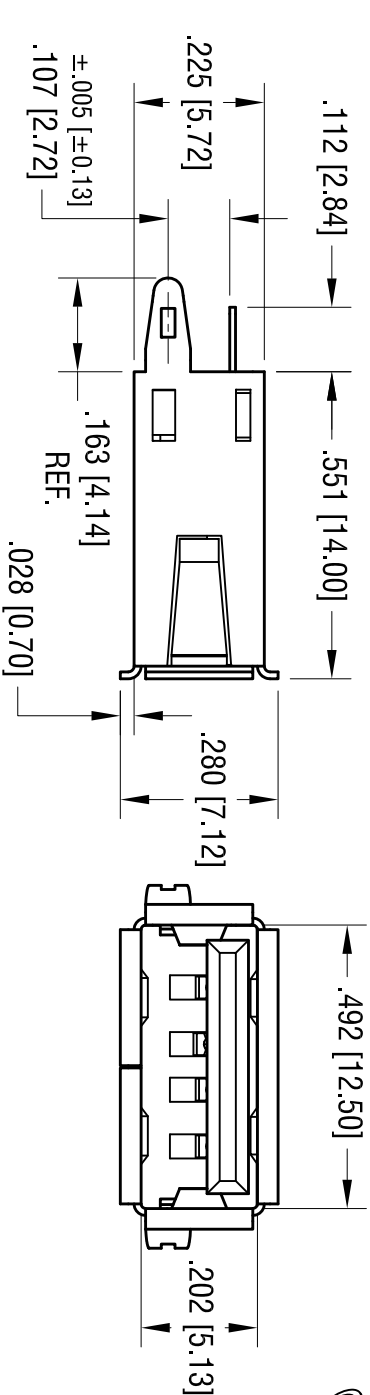


DATE	DESCRIPTION	REV.
3.23.04	CHANGE AS PER ECN 04-018	C
12.6.04	CHANGE AS PER ECN 04-167	D
6.8.05	CHANGE AS PER ECN 05-033	E
12.16.09	CHANGE AS PER ECN 09-189	F

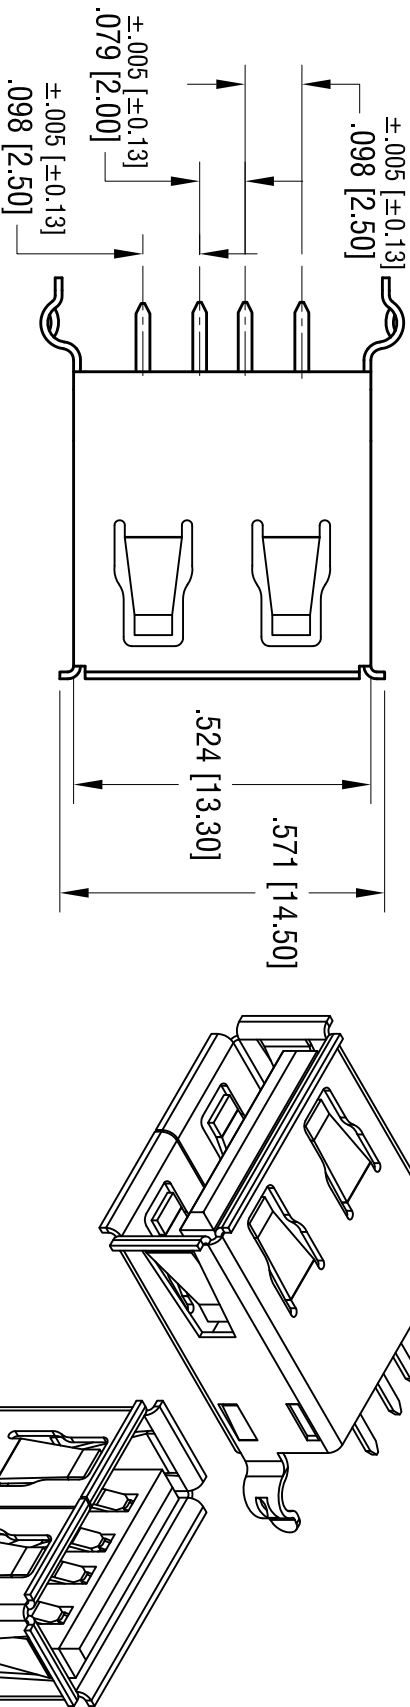

Notes:

Material:

Snell: Mat'l- Phosphor Bronze

Finish: Tin plate, over Nickel Plate

Insulator: Glass Filled LCP

Contacts: Phosphor Bronze

Finish:

Contact Area: Gold Plate over Nickel Plate

on Solder Tail: Tin Plate over Nickel Plate

Electrical Specifications

Rated Voltage: 30V AC (rms)

Contact Current Rating: 1 A Max.

Contact Resistance: 30 milliohms Max.

Dielectric Withstanding: 750V AC

Operating Temperature: -55°C to 85°C

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

<b>KEYSTONE ELECTRONICS CORP.</b>			
www.keystec.co.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME			
USB A-TYPE VERTICAL SOCKET			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		BOONE	6.18.98
TOLERANCES		APPD	SCALE
INCH		LN	3X
DECIMAL			
ANGULAR			
± .010 [± 0.25]			
UNLESS OTHERWISE SPECIFIED			
CODE		DWG NO.	
C/M		923	