THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED ADDED HARDWARE DETAIL (ECN 1277)	01/07/03	MCCORMICK
C	REVISED ELECTRICAL SPECS (ECN# 1311)	02/21/03	MCCORMICK
D	ECN #1613 - ADD COMPONENT SPECIFICATION TABLE	12/10/03	B.MAZEJKA
E	ECN #1630 - CHG'D COMPONENT SPECIFICATION TABLE	01/05/04	B.MAZEJKA

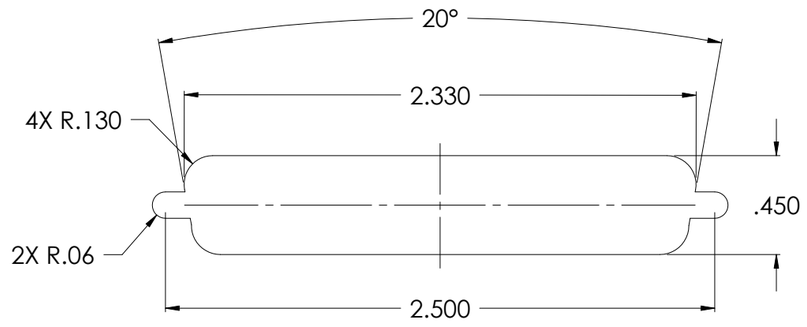

RECOMMENDED PANEL OPENING
(MAX PANEL THICKNESS: 0.06")

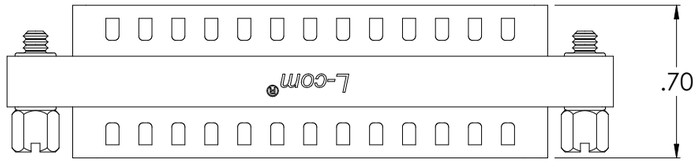

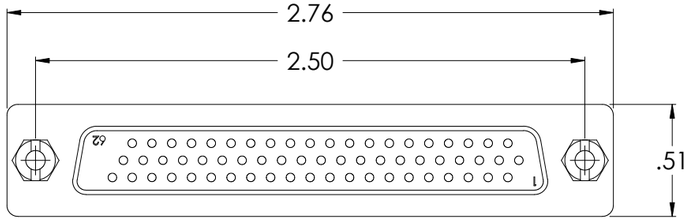





JACKSCREW
SPECIFICATION

APPLICATION NOTES:
ALL PINS WIRED STRAIGHT THROUGH

LABELING:
PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.
"GENDER CHANGER" FONT ARIAL BOLD, TEXT HEIGHTS; .085"
TEXT COLOR; WHITE.

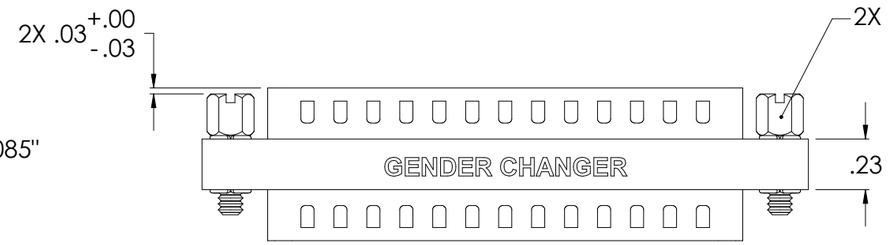



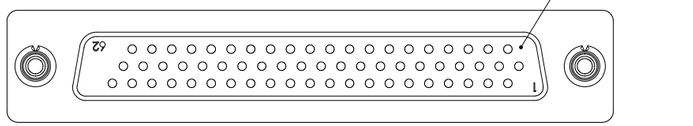

Component Specifications	
Material	
Shell	Steel
Contacts/Terminals	Copper Alloy
Hardware	Brass
Insulator	PBT Fiber Reinforced (UL 94V-0 Rated)
Finish	
Shell	Tin/Nickel Plated
Contacts/Terminals	Gold Flash Plated: 1 – 1.5µ inches
Hardware	Nickel Plated
Electrical	
Current Rating	3 AMP
Insulation Resistance	1000 MΩ Min @ 500 VDC
Dielectric Withstanding Voltage	1000 VAC (for One minute)
Environmental	
Operational Temperature Range	-55ºC to +105ºC

CS-131

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
.X ±.05
.XX ±.01
.XXX ±.005
CABLE LENGTH TOLERANCE
<300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY D.PARHAM	03/01/02
CHECKED BY T.CLARK	03/01/02
APPROVED BY R.CARRICK	03/01/02

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

L-com CONNECTIVITY PRODUCTS
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

PRODUCT DESCRIPTION
GENDER CHANGER, HD62 MALE/MALE

DRAWING TITLE
OUTLINE DRAWING

SIZE	FSCM NO.	DWG. NO.	REV.
B	43321	DGBH62M-OD1	E

SCALE: NONE | CAD FILE: DGBH62M-OD1.SLDDRW | SHEET 1 OF 1