SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)–FREE (6D)
	Sn63%, Pb37%	No	No
LF1	Sn96%, Ag4%	Yes	Yes

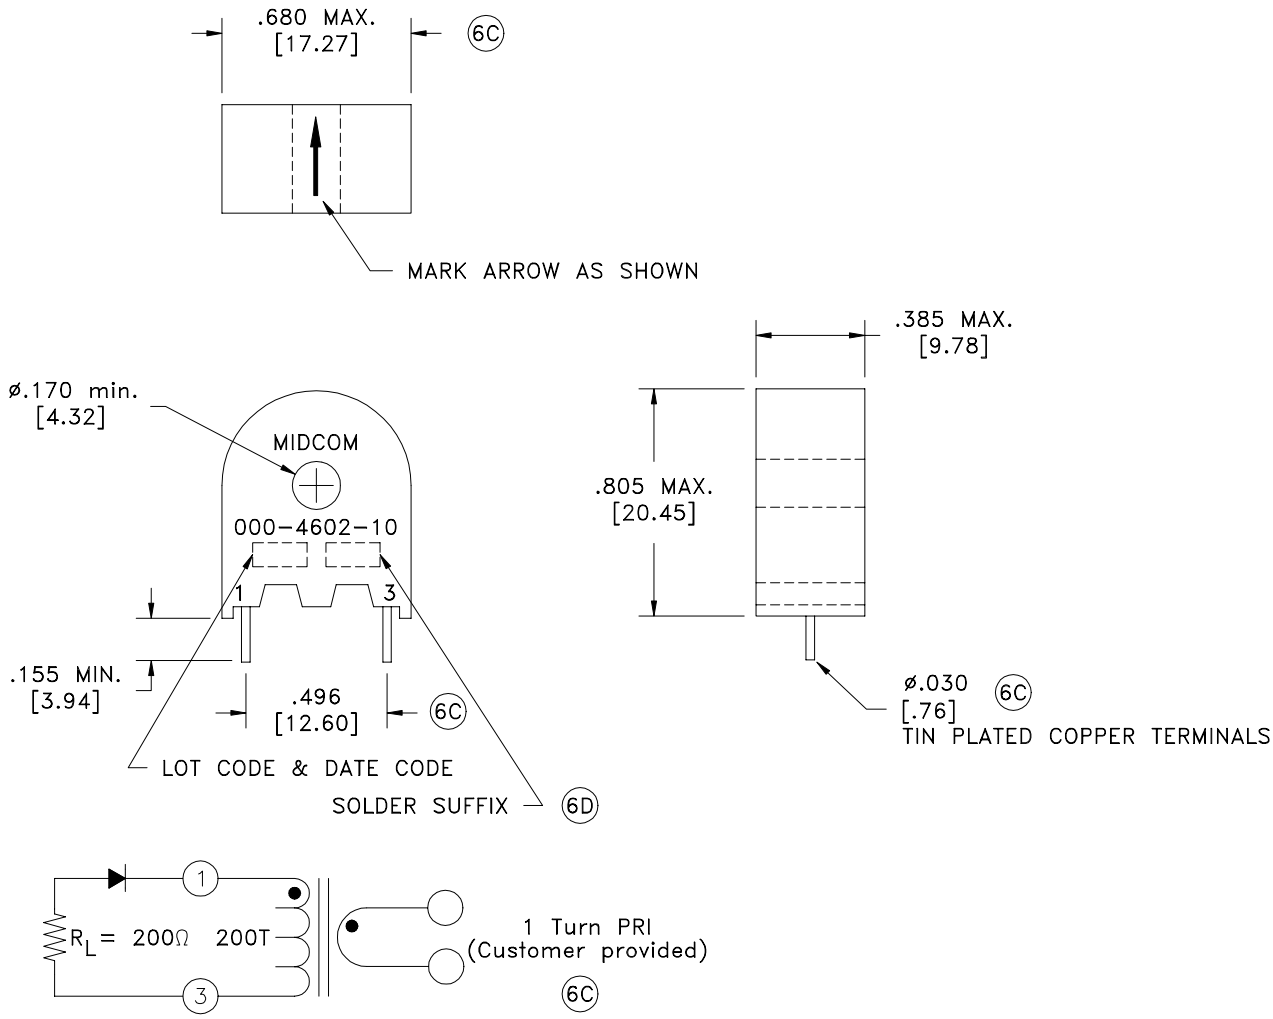

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (20°C):	1–3, 4.50 ohms max.
DIELECTRIC RATING:	3000VAC, 1 minute tested by applying 3750VAC for 1 second between 1 – brass rod.
INDUCTANCE:	80mH min., 20kHz, 1.0VAC, 1–3, Ls.
TURNS RATIO:	(1–3):(Test Turn) = 200:1.
OUTPUT:	1 Volt/Amp @ Rated R_L.
PEAK SENSE CURRENT:	20 Amps.

Midcom, Inc.
Watertown, SD USA
Toll Free: 800–643–2661
Fax: 605–886–4486

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

Unless otherwise specified:
Tolerances: Fractions: ±1/64
Angles: ±1° Decimals:±.005[.13]

DRAWING TITLE
TRANSFORMER

REVISIONS: SEE SHEET 1

Midcom

DRAWING NO. (6D) **000-4602-10/-LF1**
REV. 6D 3/06

SCALE ---
SHEET 2 OF 5

DWG.# 000–4602–10/–LF1