

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1723163108

Status:


Active

Overview:

Ultra-Fit Power Connectors

Description:

Ultra-Fit Right-Angle Header, 3.50mm Pitch, Dual Row, 8 Circuits, Matte Tin (Sn) Plating, Black, Glow-Wire Capable

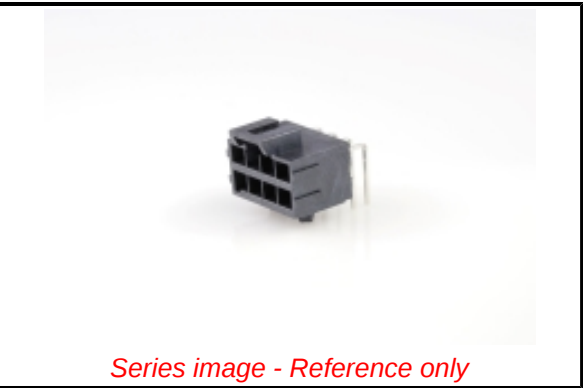

- Documents:
- 3D Model

3D Model (PDF)

Drawing (PDF)

Product Specification 1723230001-TS-000 (PDF)

Product Specification PS-172323-0001-001 (PDF)

Packaging Specification 1723161114-PK-000 (PDF)

Datasheet (PDF)

Symbol Footprint Data SYM-172316-3108 (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	PCB Headers
Series	172316
Application	Power, Wire-to-Board
Comments	See Product Specification for maximum current rating by circuit size and wire AWG
Overview	Ultra-Fit Power Connectors
Product Name	Ultra-Fit
UPC	889056866545

Physical	
Breakaway	No
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Matte Tin
Material - Plating Termination	Matte Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	3.244/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	3.20mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	3.50mm
Pitch - Termination Interface	3.50mm
Plating min - Mating	1.524µm
Plating min - Termination	1.524µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per - D(2020)4578-DC (25 June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

172316 Series

Mates With

Ultra-Fit Receptacle Housing [1722583108](#)

Ultra-Fit Cable Assembly [45133](#) , [45134](#)

Electrical

Current - Maximum per Contact	12.0A
Voltage - Maximum	600V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Packaging Specification	1723161114-PK-000
Product Specification	1723230001-TS-000, PS-172323-0001-001
Sales Drawing	1723162000-000
Symbol/Footprint Data	SYM-172316-3108

This document was generated on 07/15/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION