

SSB Coils

[Comply with RoHS]



●SSB15 Series (SSB 15-□□□)

Model	Inductance L (μH) at 10 kHz, 1mA	Rdc (mΩ) max	Rated current (A) ΔT=20℃	Current (Ref.) (A)	
				ΔT=40℃	L change rate 10%
15-1R0	1.0±20%	10	10.00	14.00	24.50
15-1R5	1.5±20%	10	8.80	12.30	19.60
15-2R2	2.2±20%	20	6.40	8.90	14.00
15-3R3	3.3±20%	20	5.90	8.20	12.20
15-4R7	4.7±20%	20	5.00	7.00	10.80
15-6R8	6.8±20%	30	4.30	6.00	8.90
15-100	10±20%	40	3.40	4.70	7.00
15-150	15±20%	60	2.70	3.70	5.70
15-220	22±20%	80	2.20	3.00	4.90
15-330	33±20%	110	1.80	2.50	4.00
15-470	47±10%	180	1.40	1.90	3.20
15-680	68±10%	220	1.20	1.60	2.70
15-101	100±10%	320	1.00	1.40	2.20
15-151	150±10%	430	0.87	1.20	1.80
15-221	220±10%	600	0.71	0.99	1.40
15-331	330±10%	960	0.55	0.77	1.20
15-471	470±10%	1400	0.45	0.63	1.00
15-681	680±10%	2000	0.36	0.50	0.85
15-102	1000±10%	3000	0.29	0.40	0.71

●SSB14 Series (SSB 14-□□□)

Model	Inductance L (μH) at 10 kHz, 1mA	Rdc (mΩ) max	Rated current (A) ΔT=20℃	Current (Ref.) (A)	
				ΔT=40℃	L change rate 10%
14-1R0	1.0±20%	10	7.00	9.80	17.50
14-1R5	1.5±20%	20	6.10	8.50	14.00
14-2R2	2.2±20%	20	5.10	7.10	11.60
14-3R3	3.3±20%	30	4.10	5.70	10.00
14-4R7	4.7±20%	30	3.80	5.30	8.70
14-6R8	6.8±20%	40	3.00	4.20	7.00
14-100	10±20%	60	2.40	3.30	5.80
14-150	15±20%	100	1.80	2.50	4.60
14-220	22±20%	120	1.60	2.20	3.80
14-330	33±20%	170	1.30	1.80	3.10
14-470	47±10%	210	1.10	1.50	2.60
14-680	68±10%	300	0.97	1.30	2.10
14-101	100±10%	480	0.75	1.00	1.80
14-151	150±10%	710	0.60	0.84	1.40
14-221	220±10%	1000	0.51	0.71	1.20
14-331	330±10%	1500	0.40	0.56	1.00
14-471	470±10%	2300	0.32	0.44	0.86
14-681	680±10%	3400	0.26	0.36	0.72
14-102	1000±10%	4400	0.23	0.32	0.58

●SSB84 Series (SSB 84-□□□)

Model	Inductance L (μH) at 10 kHz, 1mA	Rdc (mΩ) max	Rated current (A) ΔT=20°C	Current (Ref.) (A)	
				ΔT=40°C	L change rate 10%
84-1R0	1.0±20%	40	2.30	3.20	10.00
84-1R5	1.5±20%	40	2.20	3.00	8.30
84-2R2	2.2±20%	50	2.00	2.80	7.10
84-3R3	3.3±20%	50	1.90	2.60	6.20
84-4R7	4.7±20%	60	1.70	2.30	5.00
84-6R8	6.8±20%	80	1.60	2.20	4.10
84-100	10±20%	100	1.40	1.90	3.30
84-150	15±20%	110	1.20	1.60	2.70
84-220	22±20%	160	1.20	1.60	2.10
84-330	33±20%	200	1.00	1.40	1.70
84-470	47±10%	300	0.75	1.00	1.50
84-680	68±10%	410	0.70	0.98	1.20
84-101	100±10%	570	0.60	0.84	1.10
84-151	150±10%	1100	0.40	0.56	0.96
84-221	220±10%	1450	0.35	0.49	0.77
84-331	330±10%	2000	0.30	0.42	0.62
84-471	470±10%	3300	0.20	0.28	0.55
84-681	680±10%	4100	0.20	0.28	0.45
84-102	1000±10%	5600	0.18	0.25	0.35

●SSB64 Series (SSB 64-□□□)

Model	Inductance L (μH) at 10 kHz, 1mA	Rdc (mΩ) max	Rated current (A) ΔT=20°C	Current (Ref.) (A)	
				ΔT=40°C	L change rate 10%
64-1R0	1.0±20%	40	1.70	2.30	11.60
64-1R5	1.5±20%	50	1.50	2.10	10.00
64-2R2	2.2±20%	60	1.50	2.10	7.70
64-3R3	3.3±20%	70	1.50	2.10	6.30
64-4R7	4.7±20%	80	1.40	1.90	5.30
64-6R8	6.8±20%	100	1.30	1.80	4.30
64-100	10±20%	120	1.20	1.60	3.60
64-150	15±20%	150	1.00	1.40	2.90
64-220	22±20%	240	0.80	1.10	2.40
64-330	33±20%	290	0.70	0.98	2.00
64-470	47±10%	420	0.55	0.77	1.60
64-680	68±10%	830	0.40	0.56	1.40
64-101	100±10%	1000	0.35	0.49	1.00
64-151	150±10%	1100	0.30	0.42	0.86
64-221	220±10%	2400	0.30	0.42	0.71
64-331	330±10%	3150	0.20	0.28	0.59
64-471	470±10%	4000	0.19	0.26	0.49
64-681	680±10%	6600	0.15	0.21	0.41
64-102	1000±10%	8400	0.14	0.19	0.34


●SSB44 Series (SSB 44-□□□)

Model	Inductance L (μH) at 10 kHz, 1mA	Rdc (mΩ) max	Rated current (A) ΔT=20°C	Current (Ref.) (A)	
				ΔT=40°C	L change rate 10%
44-1R0	1.0±20%	70	1.90	2.60	6.70
44-1R5	1.5±20%	70	1.90	2.60	5.80
44-2R2	2.2±20%	100	1.60	2.20	4.70
44-3R3	3.3±20%	100	1.50	2.10	3.90
44-4R7	4.7±20%	100	1.30	1.80	3.10
44-6R8	6.8±20%	130	1.20	1.60	2.60
44-100	10±20%	170	0.85	1.10	2.10
44-150	15±20%	270	0.75	1.00	1.70
44-220	22±20%	370	0.65	0.91	1.30
44-330	33±20%	550	0.45	0.63	1.10
44-470	47±10%	820	0.40	0.56	0.97
44-680	68±10%	920	0.35	0.49	0.83
44-101	100±10%	1600	0.25	0.35	0.71
44-151	150±10%	1900	0.22	0.30	0.57
44-221	220±10%	3000	0.20	0.28	0.46
44-331	330±10%	4900	0.15	0.21	0.38
44-471	470±10%	7500	0.12	0.16	0.31
44-681	680±10%	8300	0.10	0.14	0.29


●Operating temperature range: -20 to +105°C (Including self-temperature rise)

Shape and Dimensions


●SSB 15Series

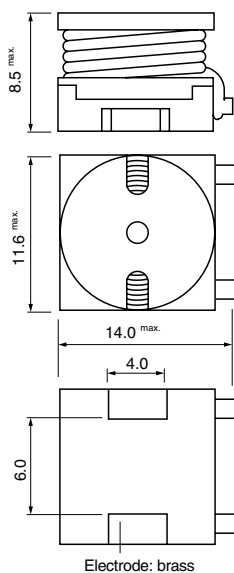


●SSB 14Series

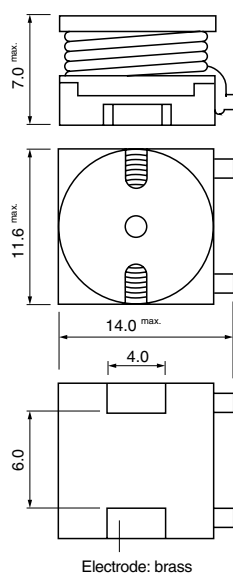


●SSB 84Series

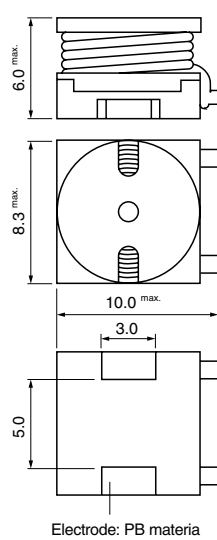

●SSB 64Series

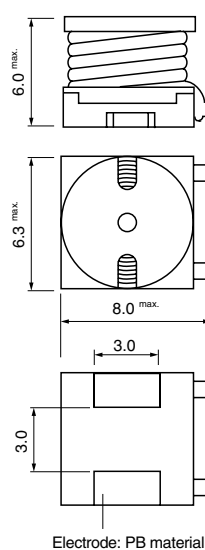


●SSB 44Series

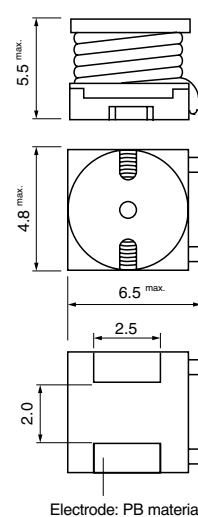


[mm]

Recommended Land Pattern


●SSB 14/15Series

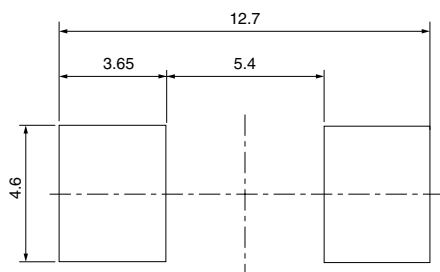


●SSB 84Series



●SSB 64Series



●SSB 44Series



[mm]

Numbering System

SSB - 44 - 101

① ② ③

① Series

② Core size (indicated by the first numbers of the core's diameter and height.)

Model and core size

The Models use 5-digit numbers that show the core size and inductance.


The first two digits show the core size, indicated by the first numbers of the core's diameter and height.

Model	Core size [mm]
SSB 15-□□□	ø11.0×5.5
SSB 14-□□□	ø11.0×4.0
SSB 84-□□□	ø8.0×4.0
SSB 64-□□□	ø6.0×4.0
SSB 44-□□□	ø4.5×4.0

③ Inductance: $10 \times 10^1 = 100 (\mu\text{H})$


SSB14, 15Series (500pcs./reel)

Dimensions of indented square hole plastic tape

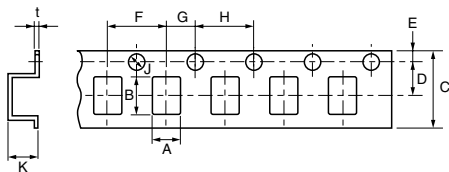

A	B	C	D	E	F	G	H	J	K	t
±0.1	±0.1	±0.3	±0.1	±0.1	±0.1	±0.1	±0.1	+0.1,-0	SSB14: 6.5±0.1	±0.05
11.7	14	24	11.5	1.75	16	2.0	4.0	ø1.5	SSB15: 8.0±0.1	0.4


Reel dimensions

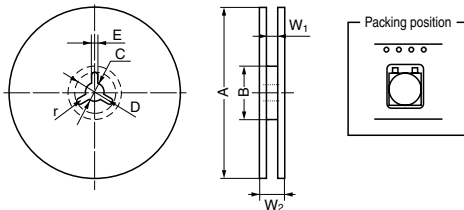

A	B	C	D	E	r	W ₁	W ₂
±2.0	±5.0	±0.5	±1.0	±0.5		±0.1	±0.3
380	80	13	21	2.0	R1.0	12.5	15.5


SSB84Series (1000pcs./reel)

Dimensions of indented square hole plastic tape

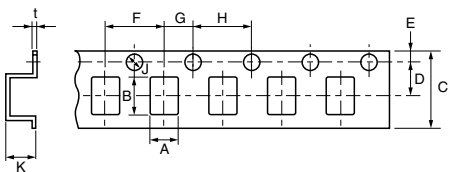

A	B	C	D	E	F	G	H	J	K	t
±0.1	±0.1	±0.3	±0.1	±0.1	±0.1	±0.1	±0.1	+0.1,-0	±0.1	±0.05
8.7	10.4	16	7.5	1.75	12	2.0	4.0	ø1.5	6.0	0.4


Reel dimensions

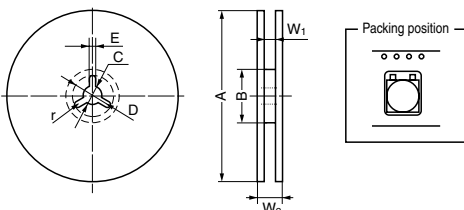

A	B	C	D	E	r	W ₁	W ₂
±2.0	±5.0	±0.5	±1.0	±0.5		±0.1	±0.3
380	80	13	21	2.0	R1.0	16.5	19.5


SSB64Series (1000pcs./reel)

Dimensions of indented square hole plastic tape

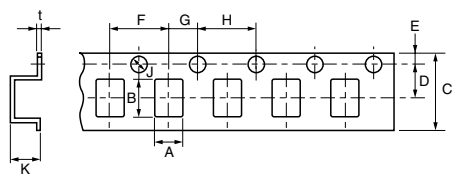

[mm]										
A	B	C	D	E	F	G	H	J	K	t
± 0.1	± 0.1	± 0.3	± 0.1	± 0.1	± 0.1	± 0.1	± 0.1	+0.1,-0	± 0.1	± 0.05
6.7	8.4	16	7.5	1.75	12	2.0	4.0	ø1.5	5.9	0.4


Reel dimensions

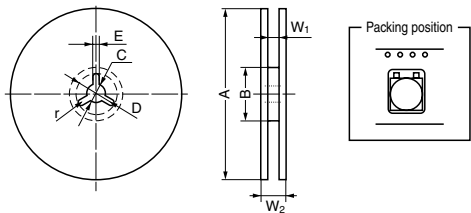

[mm]							
A	B	C	D	E	r	W ₁	W ₂
±2.0	±5.0	±0.5	±1.0	±0.5		±0.1	±0.3
380	80	13	21	2.0	R1.0	16.5	19.5


SSB44Series (2000pcs./reel)

Dimensions of indented square hole plastic tape

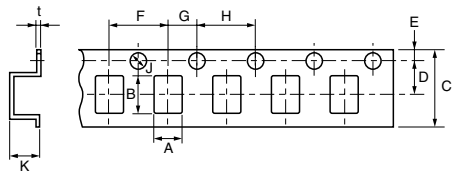

[mm]										
A	B	C	D	E	F	G	H	J	K	t
± 0.1	± 0.1	± 0.3	± 0.1	± 0.1	± 0.1	± 0.05	± 0.1	+0.1,-0	± 0.1	± 0.05
4.8	6.0	12	5.5	1.75	8.0	2.0	4.0	ø1.5	5.4	0.4

Reel dimensions

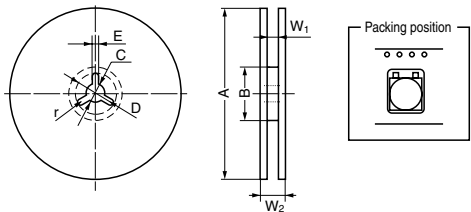

[mm]							
A	B	C	D	E	r	W ₁	W ₂
±2.0	±5.0	±0.5	±1.0	±0.5		±0.1	±0.3
380	80	13	21	2.0	R1.0	12.5	15.5