

DATA SHEET

Class 2, X7R 16/25/50/100/200 and 500 V Noble Metal Electrode Surface mount ceramic multilayer capacitors

Product specification

1999 Dec 06

Supersedes data of 7th June 1999

File under Advanced Ceramics and Modules, ACM2

Surface mount ceramic
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V
Noble Metal Electrode

FEATURES

- Seven standard sizes
- High capacitance per unit volume
- Supplied in tape on reel or in bulk case
- NiSn terminations (AgPd on request).

APPLICATIONS

- Consumer electronics, for example:
 - Tuners
 - Television receivers
 - Video recorders
 - All types of cameras
- Telecommunications
- Automotive
- Data processing.

DESCRIPTION

The capacitor consists of a rectangular block of ceramic dielectric in which a number of interleaved precious metal electrodes are contained. This structure gives rise to a high capacitance per unit volume.


The inner electrodes are connected to the two terminations, either by silver palladium (AgPd) alloy in the ratio 65 : 35, or silver dipped with a barrier layer of plated nickel and finally covered with a layer of plated tin (NiSn). A cross section of the structure is shown in Fig.1.

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Rated voltage U_R (DC)	16 V, 25 V, 50 V, 100 V, 200 V and 500 V (IEC)
Capacitance range (E12 series); note 1: 16 V 25 V 50 V; note 2 100 V 200 V 500 V	4.7 nF to 100 nF 3.3 nF to 220 nF 100 pF to 470 nF 180 pF to 330 nF 180 pF to 120 nF 470 pF to 15 nF
Tolerance on capacitance	$\pm 20\%$; $\pm 10\%$; $\pm 5\%$
Test voltage (DC) for 1 minute: 16 V, 25 V, 50 V and 100 V 200 V 500 V	$2.5 \times U_R$ $3 \times U_R$ $2 \times U_R$
Sectional specifications	IEC 60384-10, second edition 1989-04; also based on CECC 32 100
Detailed specification	based on CECC 32 101-801
Climatic category (IEC 60068)	55/125/56

Notes


1. Non E12 values are available on request.
2. Also applicable for applications up to 63 V.

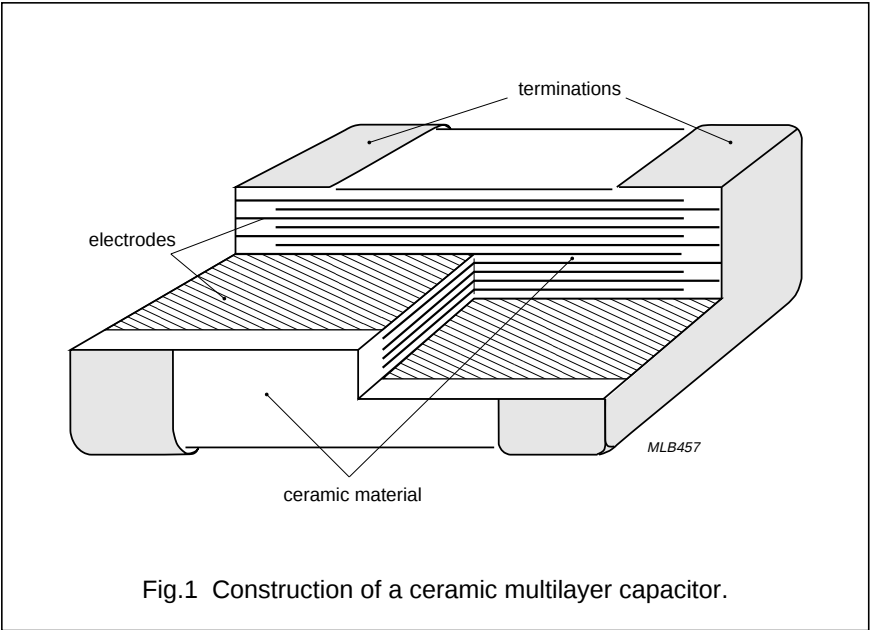

Surface mount ceramic
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V
Noble Metal Electrode

MECHANICAL DATA

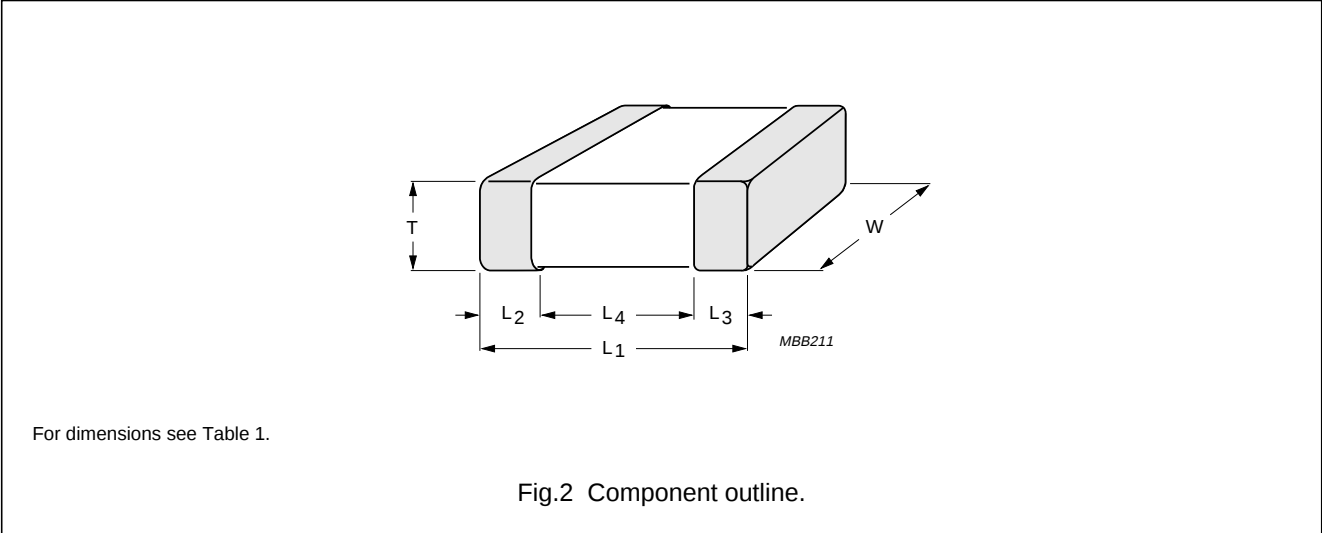

Physical dimensions

Table 1 Capacitor dimensions

CASE SIZE	L ₁	W	T		L ₂ and L ₃		L ₄ MIN.
			MIN.	MAX.	MIN.	MAX.	
Dimensions in millimetres							
0402	1.0 ±0.05	0.5 ±0.05	0.45	0.55	0.20	0.30	0.40
0603	1.6 ±0.10	0.8 ±0.07	0.73	0.87	0.25	0.65	0.40
0805	2.0 ±0.10	1.25 ±0.10	0.50	1.35	0.25	0.75	0.55
1206	3.2 ±0.15	1.6 ±0.15	0.50	1.75	0.25	0.75	1.40
1210	3.2 ±0.20	2.5 ±0.20	0.50	1.80	0.25	0.75	1.40
1812	4.5 ±0.20	3.2 ±0.20	0.50	1.80	0.25	0.75	2.20
2220	5.7 ±0.20	5.0 ±0.20	0.50	1.80	0.25	0.75	2.90
Dimensions in inches							
0402	0.040 ±0.002	0.020 ±0.002	0.018	0.022	0.008	0.012	0.016
0603	0.063 ±0.004	0.032 ±0.003	0.029	0.035	0.010	0.026	0.016
0805	0.079 ±0.004	0.049 ±0.004	0.020	0.053	0.010	0.030	0.022
1206	0.126 ±0.006	0.063 ±0.006	0.020	0.069	0.010	0.030	0.056
1210	0.126 ±0.008	0.098 ±0.008	0.020	0.072	0.010	0.030	0.056
1812	0.177 ±0.008	0.126 ±0.008	0.020	0.072	0.010	0.030	0.088
2220	0.224 ±0.008	0.197 ±0.008	0.020	0.072	0.010	0.030	0.114

Surface mount ceramic multilayer capacitors

Class 2, X7R 16 V and 25 V Noble Metal Electrode

SELECTION CHART FOR 16 V AND 25 V

C (nF)	LAST TWO DIGITS OF 12NC	16 V				25 V				
		0402	0603	0805	1206	0402	0603	0805	1206	1210
3.3	29									
3.9	31					0.5 ±0.05				
4.7	32									
5.6	33									
6.8	34									
8.2	35									
10	36	0.5 ±0.05								
12	37									
15	38						0.8 ±0.07			
18	39							0.6 ±0.1		
22	41									
27	42									
33	43									
39	44									
47	45		0.8 ±0.07							
56	46			0.6 ±0.1				0.85 ±0.1		
68	47									
82	48									
100	49									
120	51									
150	52			0.85 ±0.1					0.85 ±0.1	
180	53									
220	54									
270	55				0.85 ±0.1				1.15 ±0.1	0.5 to 1.0
330	56									
390	57			1.25 ±0.1						
470	58									0.9 to 1.3
560	59									
680	61				1.15 ±0.1	Values in shaded cells indicate thickness classification.				
820	62									
1000	63									

Thickness classification and packaging quantities

THICKNESS CLASSIFICATION (mm)	8 mm TAPE WIDTH AMOUNT PER REEL				AMOUNT PER BULK CASE		
	Ø180 mm; 7"		Ø330 mm; 13"				
	PAPER	BLISTER	PAPER	BLISTER	0402	0603	0805
0.5 ±0.05	10000	–	50000	–	50000	–	–
0.6 ±0.1	4000	–	20000	–	–	–	10000
0.85 ±0.1	4000	–	15000	–	–	–	8000
0.5 to 1.0	–	4000	–	10000	–	–	–
0.8 ±0.07	4000	–	15000	–	–	15000	–
0.9 to 1.3	–	3000	–	10000	–	–	–
1.15 ±0.1	–	3000	–	10000	–	–	–
1.25 ±0.1	–	3000	–	10000	–	–	5000

Surface mount ceramic
multilayer capacitors

Class 2, X7R 16 V and 25 V
Noble Metal Electrode

ORDERING INFORMATION FOR 16 V AND 25 V

Components may be ordered by using either a simple 15-digit clear text code or Philips unique 12NC.

Clear text code

Example: 08052R104K8BB00

SIZE CODE	TEMP. CHAR.	CAPACITANCE	TOL.	VOLTAGE	TERMINATION	PACKAGING	MARKING	SERIES
0402 0603 0805 1206 1210	2R = X7R	104 = 100 000 pF; the third digit signifies the multiplying factor: 2 = × 100 3 = × 1 000 4 = × 10 000 5 = × 100 000	J = ±5% K = ±10% M = ±20%	7 = 16 V 8 = 25 V	B = Ni-barrier	2 = 180 mm; 7" paper 3 = 330 mm; 13" paper B = 180 mm; 7" blister F = 330 mm; 13" blister P = bulk case	0 = no marking 2 = 2-character marking in North America only	0 = conv. ceramic

Ordering code 12NC

2 2 X X X X X

Carrier type
22 blister
38 paper
54 bulk

Rated voltage - Termination
78 16 V; Ni-barrier
91 25 V; Ni-barrier

Size
7 0402
6 0603
0 0805
1 1206
2 1210

X 6 X X X

Capacitance value⁽¹⁾

Tolerance
5 ±5%
6 ±10%
7 ±20%

Packaging⁽²⁾
1 reel: Ø180 mm; 7"
5 reel: Ø330 mm; 13"
4 bulk case

CCA611

(1) Refer to chapter "Selection chart for 16 V and 25 V".

(2) Amount on reel depends on thickness classification, see section "Thickness classification and packaging quantities".

Surface mount ceramic multilayer capacitors

Class 2, X7R 50 V Noble Metal Electrode

SELECTION CHART FOR 50 V

C (pF)	LAST TWO DIGITS OF 12NC	50 V						
		0402	0603	0805	1206	1210	1812	2220
100	01							
120	02							
150	03							
180	04							
220	05							
270	06							
330	07							
390	08							
470	09							
560	11	0.5 ±0.05						
680	12							
820	13							
1000	14							
1200	15		0.8 ±0.07					
1500	16							
1800	17			0.6 ±0.1				
2200	18							
2700	19							
3300	21							
3900	22							
4700	23							
5600	24							
6800	25				0.85 ±0.1			
8200	26							
10000	27							
12000	28							
15000	29							
18000	31							
22000	32							
27000	33							
33000	34					0.5 to 1.0		
39000	35			0.85 ±0.1				
47000	36							
56000	37							
68000	38							
82000	39			1.25 ±0.1				
100000	41							
120000	42							
150000	43							
180000	44				1.15 ±0.1	0.9 to 1.3	0.5 to 1.0	
220000	45							
270000	46							
330000	47							
390000	48							0.5 to 1.0
470000	49						0.9 to 1.3	
560000	51							
680000	52		Values in shaded cells indicate thickness classification.					
820000	53							
1000000	54							0.9 to 1.3

Surface mount ceramic
multilayer capacitors

Class 2, X7R 50 V
Noble Metal Electrode

Thickness classification and packaging quantities

THICKNESS CLASSIFICATION (mm)	8 mm TAPE WIDTH AMOUNT PER REEL				12 mm TAPE WIDTH AMOUNT PER REEL		AMOUNT PER BULK CASE		
	Ø180 mm; 7"		Ø330 mm; 13"		Ø180 mm; 7" BLISTER				
	PAPER	BLISTER	PAPER	BLISTER	1812	2220	0402	0603	0805
0.5 ±0.05	10000	—	50000	—	—	—	50000	—	—
0.6 ±0.1	4000	—	20000	—	—	—	—	—	10000
0.85 ±0.1	4000	—	15000	—	—	—	—	—	8000
0.5 to 1.0	—	4000	—	10000	2000	1500	—	—	—
0.8 ±0.07	4000	—	15000	—	—	—	—	15000	—
0.9 to 1.3	—	3000	—	10000	1500	1500	—	—	—
1.15 ±0.1	—	3000	—	10000	—	—	—	—	—
1.25 ±0.1	—	3000	—	10000	—	—	—	—	5000

ORDERING INFORMATION FOR 50 V

Components may be ordered by using either a simple 15-digit clear text code or Philips unique 12NC.

Clear text code

EXAMPLE: 08052R104K9BB00

SIZE CODE	TEMP. CHAR.	CAPACITANCE	TOL.	VOLTAGE	TERMINATION	PACKAGING	MARKING	SERIES
0402 0603 0805 1206 1210 1812 2220	2R = X7R	104 = 100000 pF; the third digit signifies the multiplying factor: 1 = × 10 2 = × 100 3 = × 1000 4 = × 10000 5 = × 100000	J = ±5% K = ±10% M = ±20%	9 = 50 V	B = Ni-barrier A = AgPd (2220 only)	2 = 180 mm; 7" paper 3 = 330 mm; 13" paper B = 180 mm; 7" blister F = 330 mm; 13" blister P = bulk case	0 = no marking 2 = 2-character marking in North America only	0 = conv. ceramic

Ordering code 12NC

2 2 X X X X X X 6 X X X

Carrier type

22 blister
38 paper
54 bulk

Rated voltage - Termination

58 50 V; Ni-barrier
59 50 V; AgPd (2220 only)

Size

7 0402
6 0603
0 0805
1 1206
2 1210
4 1812
5 2220

Capacitance value⁽¹⁾

Tolerance

5 ±5%
6 ±10%
7 ±20%

Packaging⁽²⁾

1 reel: Ø180 mm; 7"
5 reel: Ø330 mm; 13"
4 bulk case

CCA612

(1) Refer to chapter "Selection chart for 50 V".

(2) Amount on reel depends on thickness classification, see section "Thickness classification and packaging quantities".

Surface mount ceramic multilayer capacitors

Class 2, X7R 100 V, 200 V and 500 V Noble Metal Electrode

SELECTION CHART FOR 100 V, 200 V AND 500 V

C (pF)	LAST TWO DIGITS OF 12NC	100 V				200 V				500 V		
		0805	1206	1210	1812	0805	1206	1210	1812	1206	1210	1812
180	13											
220	14											
270	15											
330	16											
390	17											
470	18											
560	19											
680	21											
820	22											
1000	23					0.85 ±0.1				1.15 ±0.1		
1200	24											
1500	25	0.6 ±0.1										
1800	26											
2200	27											
2700	28											
3300	29		0.85 ±0.1				0.85 ±0.1					
3900	31										0.9 to 1.3	
4700	32											
5600	33											
6800	34					1.25 ±0.1					1.2 to 1.75	
8200	35											
10000	36											
12000	37											0.9 to 1.3
15000	38											
18000	39	0.85 ±0.1										
22000	41						1.15 ±0.1					
27000	42							0.8 to 1.0				
33000	43											
39000	44											
47000	45							0.9 to 1.3				
56000	46								0.5 to 1.0			
68000	47			0.5 to 1.0								
82000	48		1.15 ±0.1									
100000	49								0.9 to 1.3			
120000	51			0.9 to 1.3								
150000	52				0.5 to 1.0							
180000	53											
220000	54											
270000	55				0.9 to 1.3	Values in shaded cells indicate thickness classification.						
330000	56											

Surface mount ceramic
multilayer capacitors

Class 2, X7R 100 V, 200 V and 500 V
Noble Metal Electrode

Thickness classification and packaging quantities

THICKNESS CLASSIFICATION (mm)	8 mm TAPE WIDTH AMOUNT PER REEL				12 mm TAPE WIDTH AMOUNT PER REEL	AMOUNT PER BULK CASE
	Ø180 mm; 7"		Ø330 mm; 13"		Ø180 mm; 7" BLISTER	
	PAPER	BLISTER	PAPER	BLISTER	1812	
0.6 ±0.1	4 000	–	20 000	–	–	10 000
0.85 ±0.1	4 000	–	15 000	–	–	8 000
0.8 to 1.0	–	4 000	–	10 000	–	–
0.5 to 1.0	–	4 000	–	10 000	2 000	–
0.9 to 1.3	–	3 000	–	10 000	1 500	–
1.15 ±0.1	–	3 000	–	10 000	–	–
1.25 ±0.1	–	3 000	–	10 000	–	5 000
1.2 to 1.75	–	2 500	–	10 000	–	–

ORDERING INFORMATION FOR 100 V, 200 V AND 500 V

Components may be ordered by using either a simple 15-digit clear text code or Philips unique 12NC.

Clear text code

Example: 18122R104KBBB00

SIZE CODE	TEMP. CHAR.	CAPACITANCE	TOL.	VOLTAGE	TERMINATION	PACKAGING	MARKING	SERIES
0805 1206 1210 1812	2R = X7R	104 = 100 000 pF; the third digit signifies the multiplying factor: 1 = × 10 2 = × 100 3 = × 1 000 4 = × 10 000	J = ±5% K = ±10% M = ±20%	0 = 100 V B = 200 V D = 500 V	B = Ni-barrier	2 = 180 mm; 7" paper 3 = 330 mm; 13" paper B = 180 mm; 7" blister F = 330 mm; 13" blister P = bulk case	0 = no marking 2 = 2-character marking in North America only	0 = conv. ceramic

Ordering code 12NC

2 2 X X X X X X X

Carrier type
22 blister
38 paper
54 bulk

Rated voltage - Termination
60 100 V; Ni-barrier
93 200 V; Ni-barrier
97 500 V; Ni-barrier

Size
0 0805
1 1206
2 1210
4 1812

X 6 X X X

Capacitance value⁽¹⁾

Tolerance
5 ±5%
6 ±10%
7 ±20%

Packaging⁽²⁾
1 reel: Ø180 mm; 7"
5 reel: Ø330 mm; 13"
4 bulk case

CCA613

(1) Refer to chapter "Selection chart for 100 V, 200 V and 500 V".

(2) Amount on reel depends on thickness classification, see section "Thickness classification and packaging quantities".

Surface mount ceramic
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V
Noble Metal Electrode

ELECTRICAL CHARACTERISTICS



Class 2 capacitors; X7R dielectric; AgPd and NiSn terminations

Unless otherwise stated all electrical values apply at an ambient temperature of 20 ±1 °C, an atmospheric pressure of 86 to 106 kPa, and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance range (E12 series); note 1	100 pF to 100 nF
Tolerance on capacitance after 1000 hours	±20%; ±10%; ±5%; note 2
Tan δ; note 1	≤2.5%; 16 V range ≤3.5%
Insulation resistance after 1 minute at U _R (DC): C ≤ 10 nF C > 10 nF	R _{ins} > 100 GΩ R _{ins} × C > 1000 seconds
Maximum capacitance change as a function of temperature (for typical values see Fig.3)	±15%
Ageing	typical 1% per time decade

Notes

1. Measured at 1 V, 1 kHz, using a four-gauge method.
2. Tolerance of ±1% available on request.

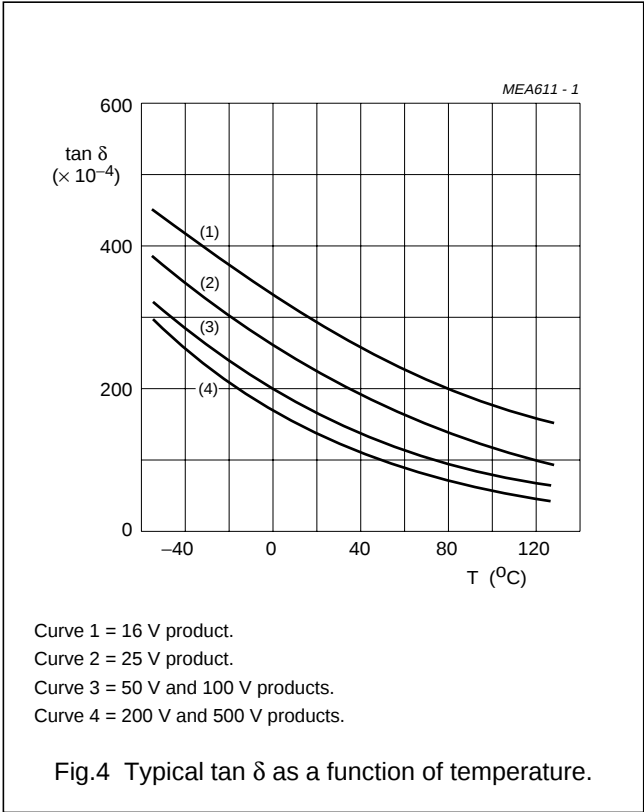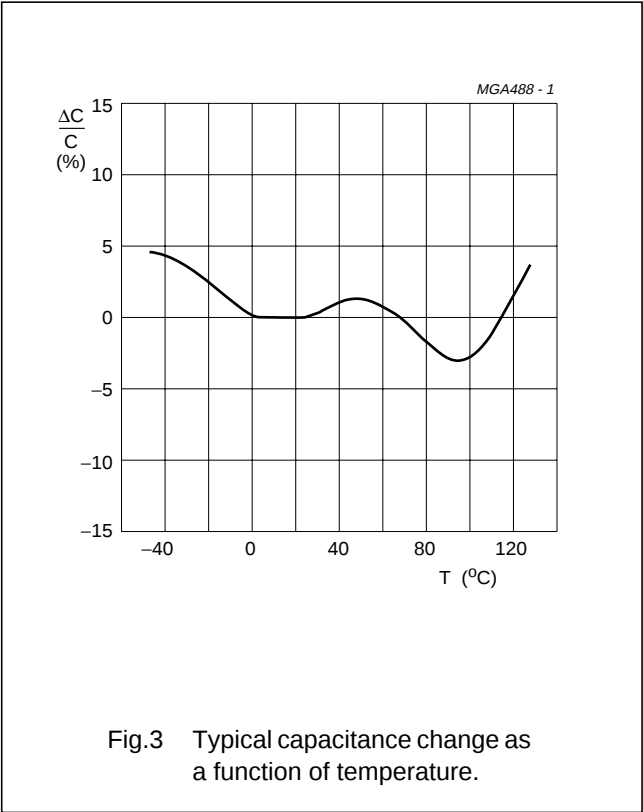

Surface mount ceramic multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V Noble Metal Electrode

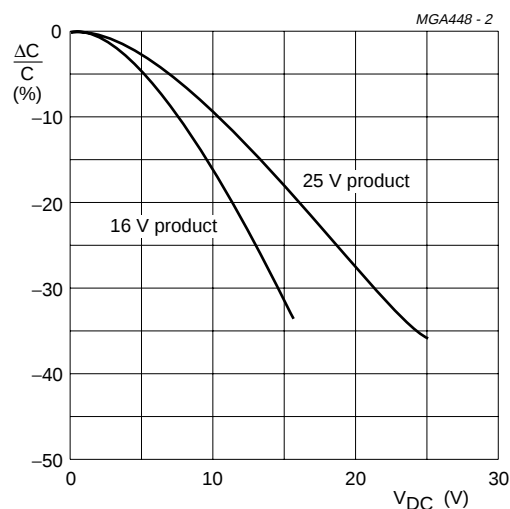


Fig.5 Typical capacitance change with respect to the capacitance at 1 V as a function of DC voltage at 20 °C.

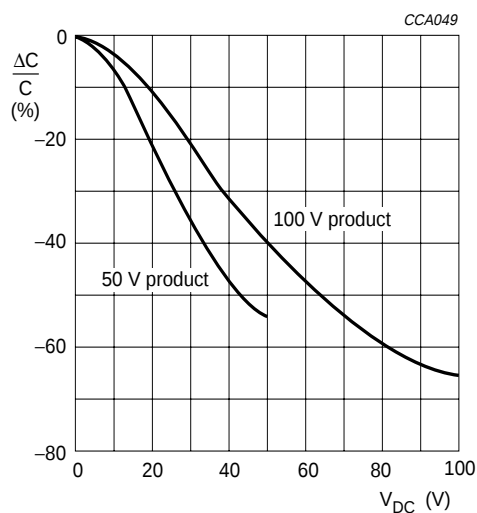


Fig.6 Typical capacitance change with respect to the capacitance at 1 V as a function of DC voltage at 20 °C.

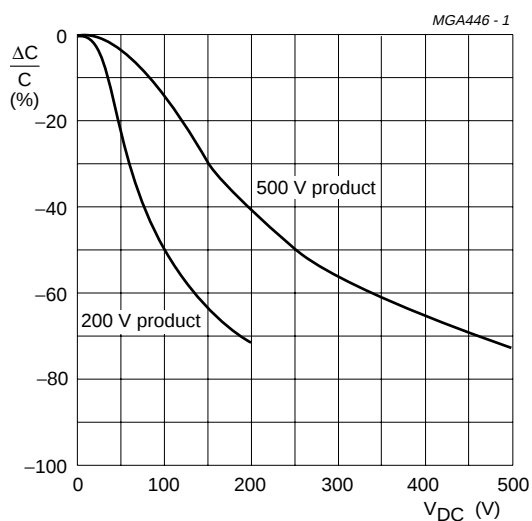


Fig.7 Typical capacitance change with respect to the capacitance at 1 V as a function of DC voltage at 20 °C.

**Surface mount ceramic
multilayer capacitors**

**Class 2, X7R 16/25/50/100/200 and 500 V
Noble Metal Electrode**

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

Surface mount ceramic
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V
Noble Metal Electrode

NOTES

Surface mount ceramic
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V
Noble Metal Electrode

NOTES

Surface mount ceramic
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V
Noble Metal Electrode

NOTES

Philips Components – a worldwide company

Australia: Philips Components Pty Ltd., HOMEBUSH,
Tel. +61 2 9704 8141, Fax. +61 2 9704 8139

Austria: Österreichische Philips Industrie GmbH, WIEN,
Tel. +43 1 60 101 12 41, Fax. +43 1 60 101 12 11

Belarus: Philips Office Belarus, MINSK,
Tel. +375 172 200 924/733, Fax. +375 172 200 773

Benelux: Philips Components B.V., EINDHOVEN, NL,
Tel. +31 40 25 90 772, Fax. +31 40 25 90 777

Brazil: Philips Components, SÃO PAULO,
Tel. +55 11 821 2333, Fax. +55 11 829 1849

Canada: Philips Electronics Ltd., SCARBOROUGH,
Tel. +1 416 292 5161, Fax. +1 416 754 6248

China: Philips Company, SHANGHAI,
Tel. +86 21 6354 1088, Fax. +86 21 6354 1060

Denmark: Philips Components A/S, COPENHAGEN V,
Tel. +45 3329 3333, Fax. +45 3329 3905

Finland: Philips Components, ESPOO,
Tel. +358 9 615 800, Fax. +358 9 615 80510

France: Philips Composants, SURESNES,
Tel. +33 1 4099 6161, Fax. +33 1 4099 6493

Germany: Philips Components GmbH, HAMBURG,
Tel. +49 40 2489-0, Fax. +49 40 2489 1400

Hong Kong: Philips Hong Kong, KOWLOON,
Tel. +852 2784 3000, Fax. +852 2784 3003

India: Philips India Ltd., MUMBAI,
Tel. +91 22 4930 311, Fax. +91 22 4930 966/4950 304

Indonesia: P.T. Philips Development Corp., JAKARTA,
Tel. +62 21 794 0040, Fax. +62 21 794 0080

Ireland: Philips Electronics (Ireland) Ltd., DUBLIN,
Tel. +353 1 7640 203, Fax. +353 1 7640 210

Israel: Rapac Electronics Ltd., TEL AVIV,
Tel. +972 3 6450 444, Fax. +972 3 6491 007

Italy: Philips Components S.r.l., MILANO,
Tel. +39 2 6752 2531, Fax. +39 2 6752 2557

Japan: Philips Japan Ltd., TOKYO,
Tel. +81 3 3740 5135, Fax. +81 3 3740 5035

Korea (Republic of): Philips Electronics (Korea) Ltd., SEOUL,
Tel. +82 2 709 1472, Fax. +82 2 709 1480

Malaysia: Philips Malaysia SDN Berhad,
Components Division, PULAU PINANG,
Tel. +60 3 750 5213, Fax. +60 3 757 4880

Mexico: Philips Components, EL PASO, U.S.A.,
Tel. +52 915 772 4020, Fax. +52 915 772 4332

New Zealand: Philips New Zealand Ltd., AUCKLAND,
Tel. +64 9 815 4000, Fax. +64 9 849 7811

Norway: Philips Components, STOCKHOLM,
Tel. +46 8 5985 2000, Fax. +46 8 5985 2745

Pakistan: Philips Electrical Industries of Pakistan Ltd., KARACHI,
Tel. +92 21 587 4641-49, Fax. +92 21 577 035/+92 21 587 4546

Philippines: Philips Semiconductors Philippines Inc.,
METRO MANILA, Tel. +63 2 816 6345, Fax. +63 2 817 3474

Poland: Philips Poland Sp. z.o.o., WARSZAWA,
Tel. +48 22 5710 000, Fax. +48 22 5710 001

Portugal: Philips Portuguesa S.A.,
Philips Components: LINDA-A-VELHA,
Tel. +351 1 416 3160/416 3333, Fax. +351 1 416 3174/416 3366

Russia: Philips Russia, MOSCOW,
Tel. +7 95 755 6918, Fax. +7 95 755 6919

Singapore: Philips Singapore Pte Ltd., SINGAPORE,
Tel. +65 350 2000, Fax. +65 355 1758

South Africa: S.A. Philips Pty Ltd., JOHANNESBURG,
Tel. +27 11 470 5911, Fax. +27 11 470 5494

Spain: Philips Components, BARCELONA,
Tel. +34 93 301 63 12, Fax. +34 93 301 42 43

Sweden: Philips Components, STOCKHOLM,
Tel. +46 8 5985 2000, Fax. +46 8 5985 2745

Switzerland: Philips Components AG, ZÜRICH,
Tel. +41 1 488 22 11, Fax. +41 1 481 7730

Taiwan: Philips Taiwan Ltd., TAIPEI,
Tel. +886 2 2134 2900, Fax. +886 2 2134 2929

Turkey: Türk Philips Ticaret A.S., UMRABIYE/ISTANBUL,
Tel. +90 216 522 18 00, Fax. +90 216 522 18 14

United Kingdom: Philips Components Ltd., DORKING,
Tel. +44 1306 512 000, Fax. +44 1306 512 345

United States:

- Philips Components, SAN JOSE, CA,
Tel. +1 408 570 5600, Fax. +1 408 570 5700
- Philips Display Components, ANN ARBOR, MI,
Tel. +1 734 996 9400, Fax. +1 734 761 2776
- Philips Discrete Ceramics, CHARLOTTE, NC,
Tel. +1 915 860 3267, Fax. +1 915 860 3270
- Philips Ferrite Ceramics, ROSWELL, GA,
Tel. +1 877 433 77483, Fax. +1 770 992 0725

Yugoslavia (Federal Republic of): Philips Components, BELGRADE,
Tel. +381 11 625 344 / +381 11 3341 299, Fax. +381 11 635 777

Internet:

- Discrete and Ferrite Ceramics: www.acm.components.philips.com
- Display Components: www.philipsdisplay.com

For all other countries apply to:

Philips Components, Building BAE-1, P.O. Box 218, 5600 MD EINDHOVEN,
The Netherlands, Fax. +31 40 27 22 599

COD33

© Philips Electronics N.V. 1999

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

041010/500/03/pp16
Document order number:

Date of release: 1999 Dec 06
9397 378 57011

Let's make things better.