


HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS

EFD Platforms - EFD15, EFD20 and EFD25

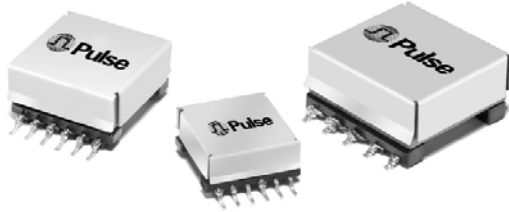

- 🔌 Transformers and Inductors
- 🔌 Power: 30W to 180W
- 🔌 Three Different Platforms: THT and SMT
- 🔌 Low Profile Platforms: 8.4mm to 13.5mm
- 🔌 Custom designs available

Electrical Specifications @ 25°C — Operating Temperature -40°C to 125°C

TRANSFORMERS											
Part Number	Application ²	Turns Ratio			Primary Secondary Isolation	Primary Inductance (μH MIN)	Leakage Inductance (μH MAX)	DCR (mΩ MAX)			
		Pri.	Sec.	Pri. Aux.				Pri.	Pri. Aux.	Sec. A	Sec. B
EFD 15 PLATFORMS - UP TO 30W											
EFD 15 - 10 PIN SMT - (22.2MM x 16.3MM x 8.4MM)											
PB2187	15W Flyback Transformer Vin=18-72v, Freq.=500kHz Vout=5v/3A, 10v/20mA	24 with 16T aux	12	N/A	650Vdc Operational	38 @ 2.2A	0.6	190	410	50	N/A
EFD 15 - 12 PIN SMT - (22.2MM x 17.2MM x 9.5MM)											
PA0476	15W Flyback Transformer Vin=18-72v, Freq.=500kHz Vout=5v/3A, 10v/20mA	16 with 7T aux	3	N/A	500Vrms Operational	36.9 @ 0.6A	0.15	23.5	87	8	N/A
PA0691	15W Flyback Transformer Vin=18-72v, Freq.=500kHz Vout=3.3v/3A, 5.6v/10mA10v/20mA	52	8	26 (pri)	500Vdc Operational	146 @ 1.2A	2.0	600	2000	20 (3.3v)	720 (5.6v)
PA1039	15W Flyback Transformer Vin=18-72v, Freq.=500kHz Vout=3.3v/3A, 5.6v/10mA10v/20mA	50	10 & 15	22.0	500Vdc Operational	137.5 @ 1.2A	2.0	500	1300	25	760
EFD 20 PLATFORMS - UP TO 80W											
EFD 20 - 10 PIN SMT - (26.2MM x 21.8MM x 10.4MM)											
PB2003	30W Flyback Transformer Vin=36-72v, Freq.=300kHz Vout=5v/6A, 15v/0.1A	16 with 7T aux	2	N/A	1500Vrms Operational	29.2 @ 3.0A	1.7	75	75	4.5	N/A
EFD 20 - 12 PIN SMT - (26.2MM x 21.8MM x 10.4MM)											
PA0273	50W Flyback Transformer Vin=36-72v, Freq.=250kHz Vout=12v/4.5A, 12v/0.1A	16 with 10T aux	10	N/A	1500Vrms Basic	230	0.35	65	225	27	N/A
PA0751	13W Flyback Transformer Vin=25-75v, Freq.=250kHz Vout=3.3v/4A, 15v/100A	28	6	18	700Vdc Operational	110	2	85	300	12	N/A
PA0769	100W Forward Transformer Vin=36-75v, Freq.=250kHz Vout=±12v/2.1A, 5v/9A	15 with 7T aux	7 & 7 & 3	N/A	1500Vdc Operational	270	1.5	35	135	35 & 35 (±12v)	3.5 (5v)
PB2041	48W Forward Transformer Vin=36-75v, Freq.=230kHz Vout=12v/3A, -12v/1A	20	12 & 12	N/A	1500Vrms Basic	324	1	817	N/A	30.8 (+12v)	86.4 (-12v Sec)
PB2089	33W Forward Transformer Vin=36-72v, Freq.=250kHz Vout=3.3v/10A, 2.2v/0.05A	13	3 & 2	N/A	1500Vrms Basic	141	1	31	923	5.5 (3.3v Sec)	112 (2.2v Sec)
PB2134	12W Flyback Transformer Vin=36-57v, Freq.=200kHz Vout=3.3v/3.5A, 12v/0.1A	32	4	16	1800Vdc Operational	195 @ 1.0A	5	200	215	12	N/A
PB2157	13W Forward Transformer Vin=31-57v, Freq.=200kHz Vout=3.3v/3.5A, 12v/0.1A	17	4	6	1500Vdc Operational	243	2	280	150	4.5	N/A
EFD 25 PLATFORMS - UP TO 180W											
EFD 25 - 10 PIN THT - (26.4MM x 26.1MM x 14.0MM)											
PA0397	100W Forward Transformer Vin=36-75v, Freq.=250kHz Vout=3.3v/30A, 12v/0.1A	9	2	8	1500Vdc Basic	113	0.64	21	570	3.3	N/A
EFD 25 - 10 PIN SMT - (32.0MM x 26.2MM x 13.5MM)											
PA0302	165 F-Bridge Transformer Vin=21-56v, Freq.=230kHz Vout=15v/11A	1	1	1	500Vrms Operational	24	0.1	8	130	8	8
EFD 25 - 12 PIN SMT - (32.0MM x 26.2MM x 13.5MM)											
PA0700	72W Forward Transformer Vin=12v, Freq.=250kHz Vout=48v/1.5A	3	22	N/A	2250Vrms Operational	21.4	0.5	4	N/A	95	N/A

HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS

EFD Platforms - EFD15, EFD20 and EFD25



Electrical Specifications @ 25°C — Operating Temperature -40°C to 125°C


INDUCTORS											
Part Number	Application ²	Induct. @ Irated (μH MIN)	Irated (Adc)	Turns Ratio	DCR (mΩ MAX)			Induct. 0 Adc ³ (μH ±7%)	Saturation Current ⁴ @25°	Heating Current ⁵ (A)	±12v Winding to Aux. Isolation
					Winding 1	Winding 2	Winding 3				
EFD 20 PLATFORMS											
EFD 20 - 12 PIN SMT - (29.5MM x 21.8MM x 11.4MM)											
PB2042	Output Inductor for PB2041 Transformer	13	4	3:3:4 (+12v:-12v:Aux)	29.2 (+12v)	87.6 (+12v)	253 (15v Aux.)	14.4	5	4	1500 Vrms Basic

Notes:

- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
- The rated current as listed is either 85% of the saturation current or the heating current whichever is lower.
- The saturation current is the current which causes the inductance to drop by 20% at 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current is the dc current which causes the temperature of the part to increase by approximately 40°C.
- Add 'T' suffix to the part number for Tape & Reel version (ie: PB2041T).

Mechanicals

EFD 15

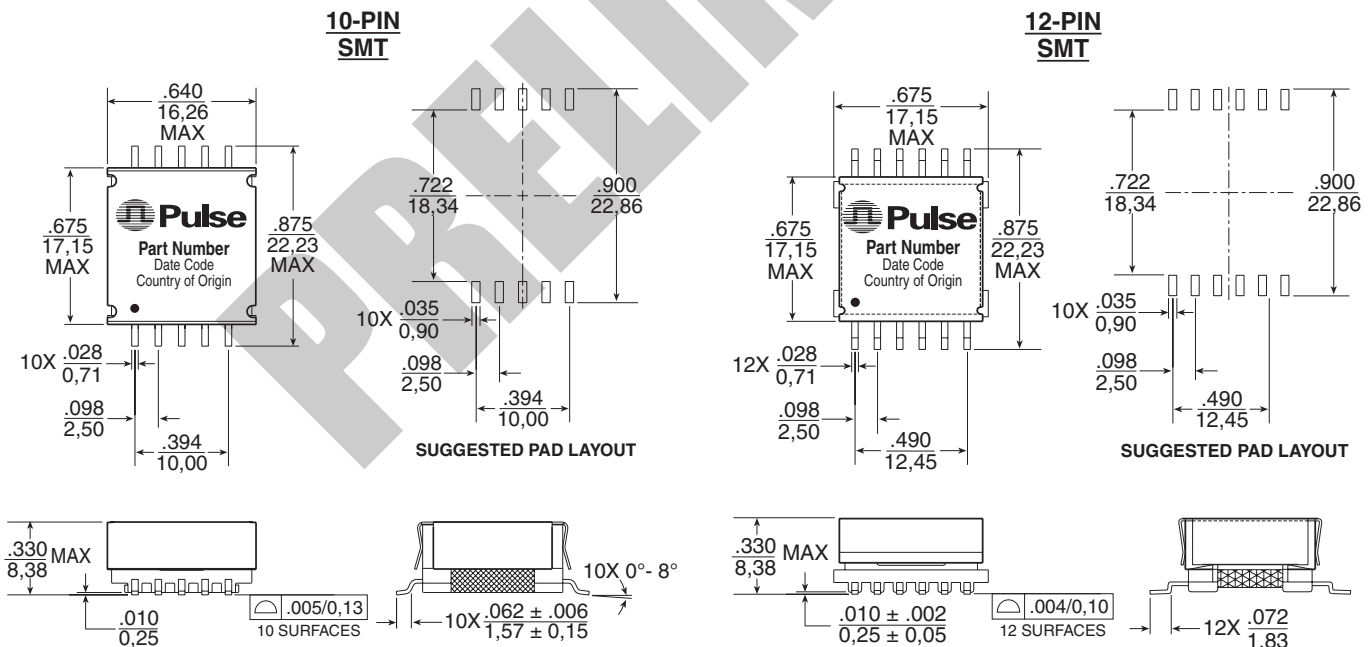


HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS

EFD Platforms - EFD15, EFD20 and EFD25



Mechanicals

EFD 20

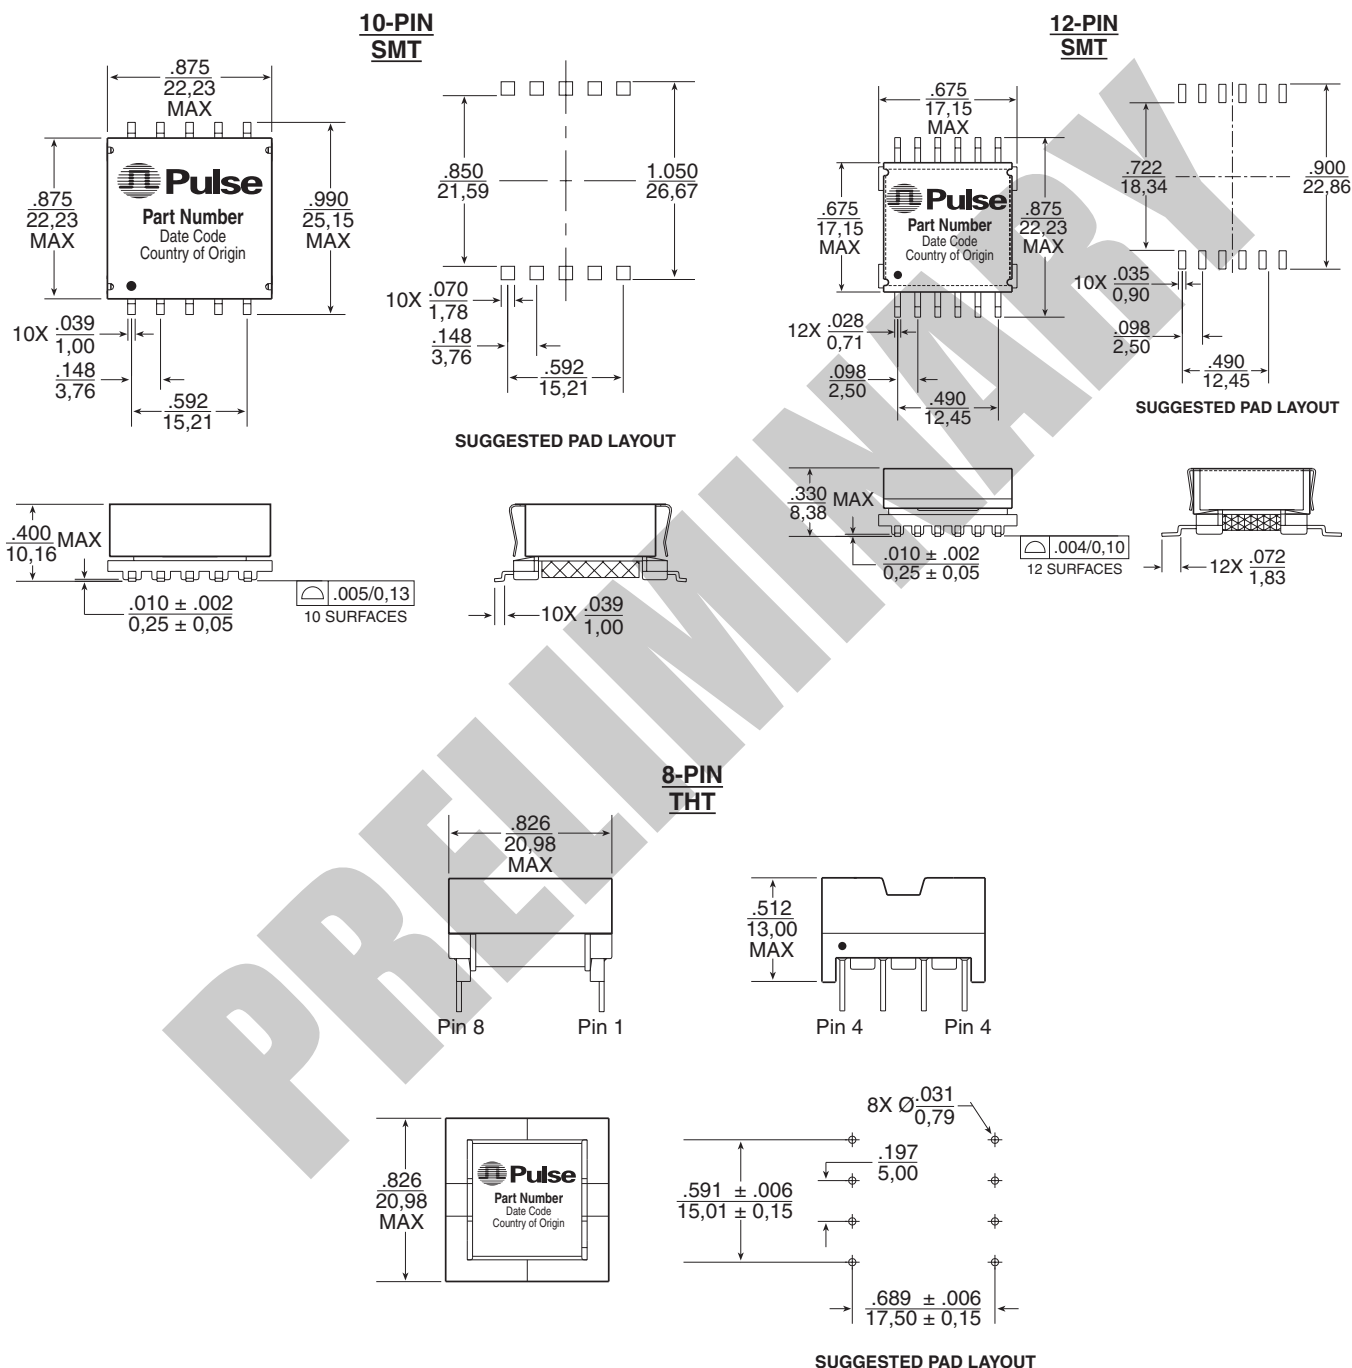


HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS

EFD Platforms - EFD15, EFD20 and EFD25



Mechanicals

EFD 25

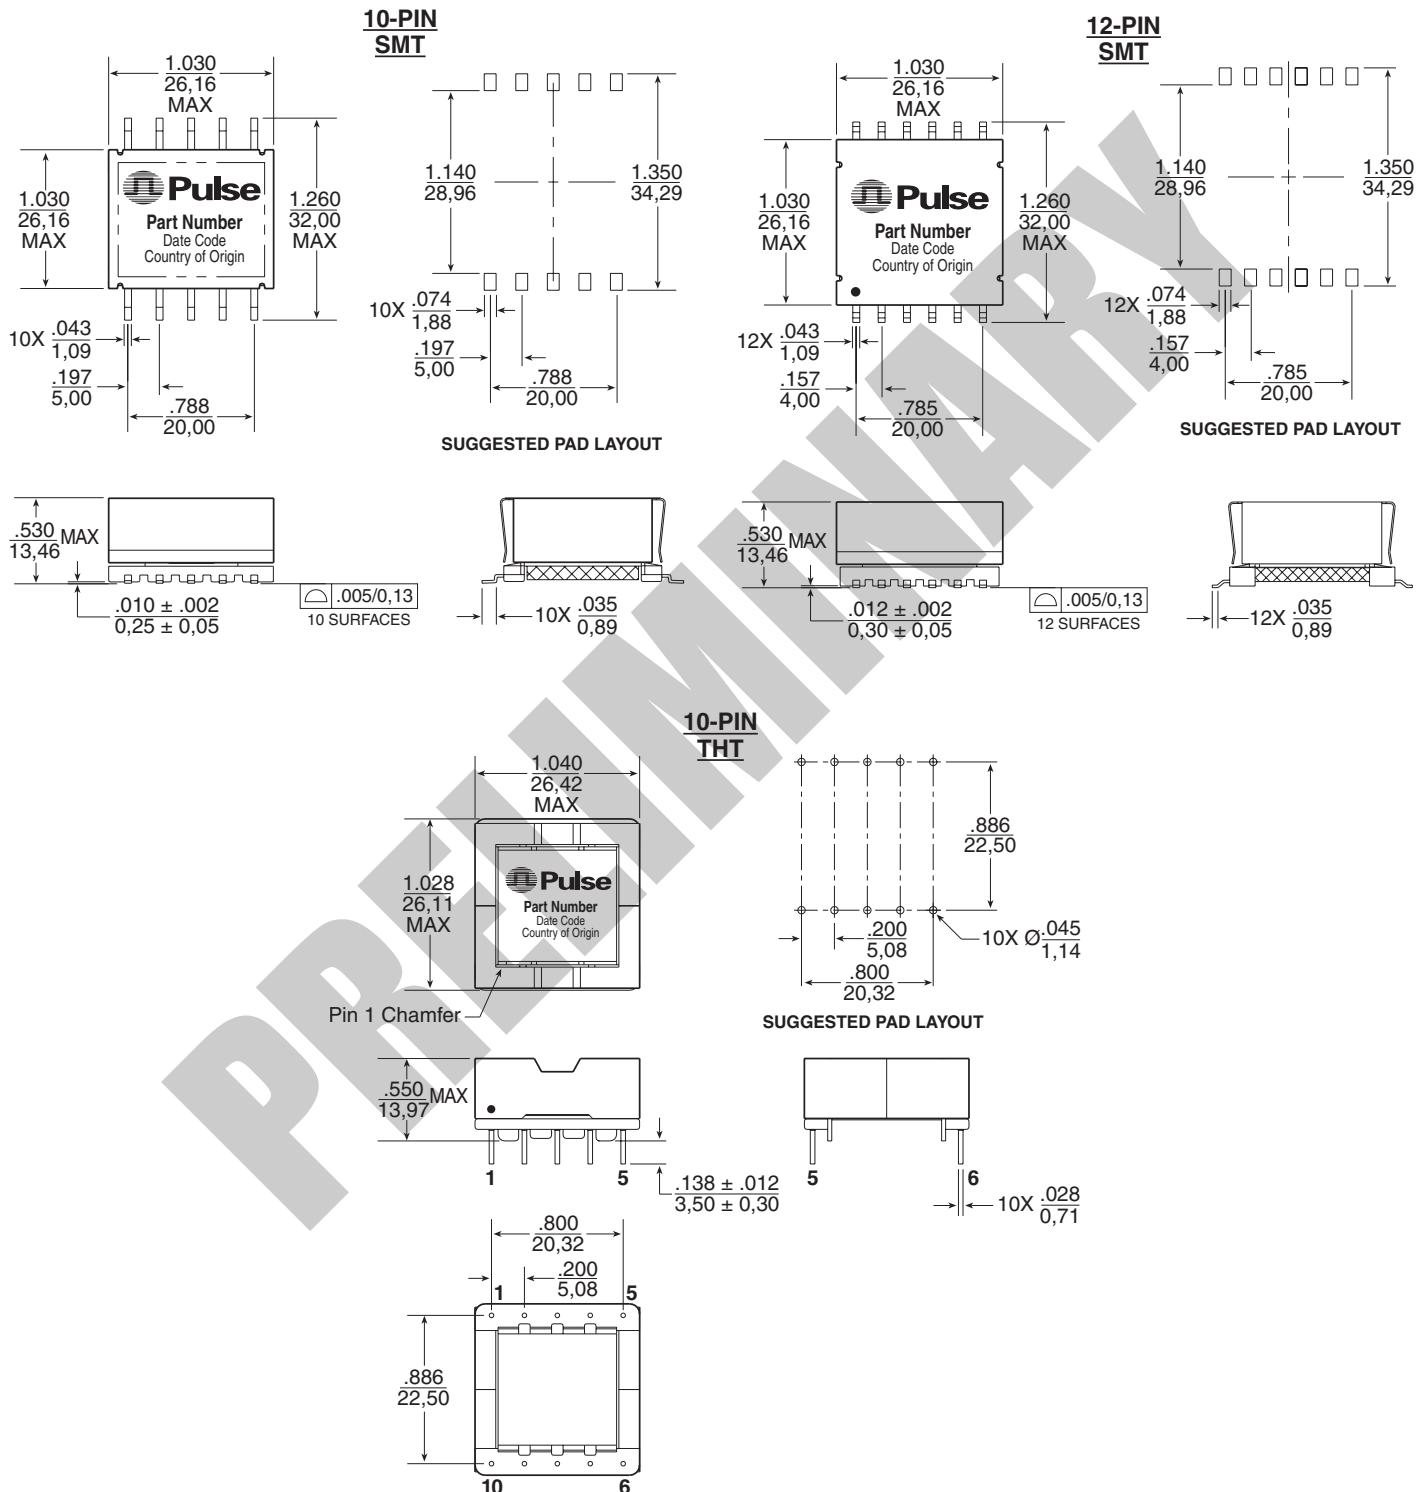

HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS


EFD Platforms - EFD15, EFD20 and EFD25




Pulse
A TECHNITROL COMPANY

Schematics

EFD 15

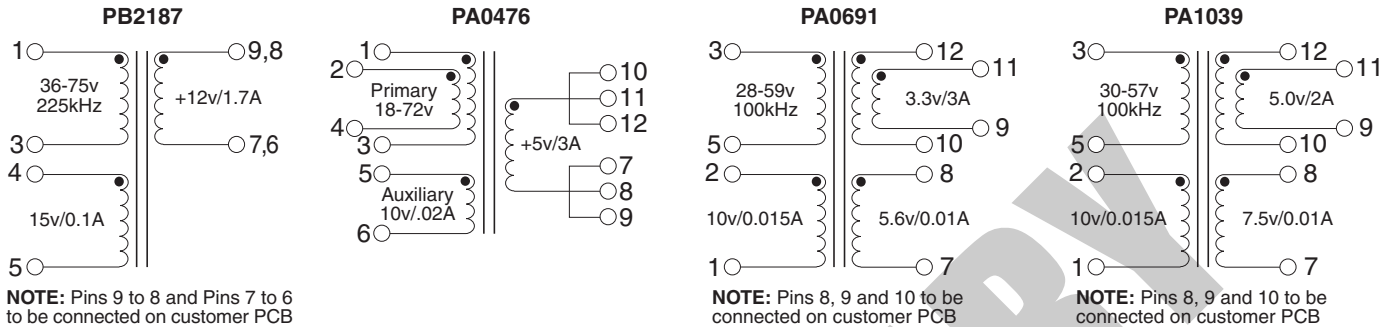

EFD 20

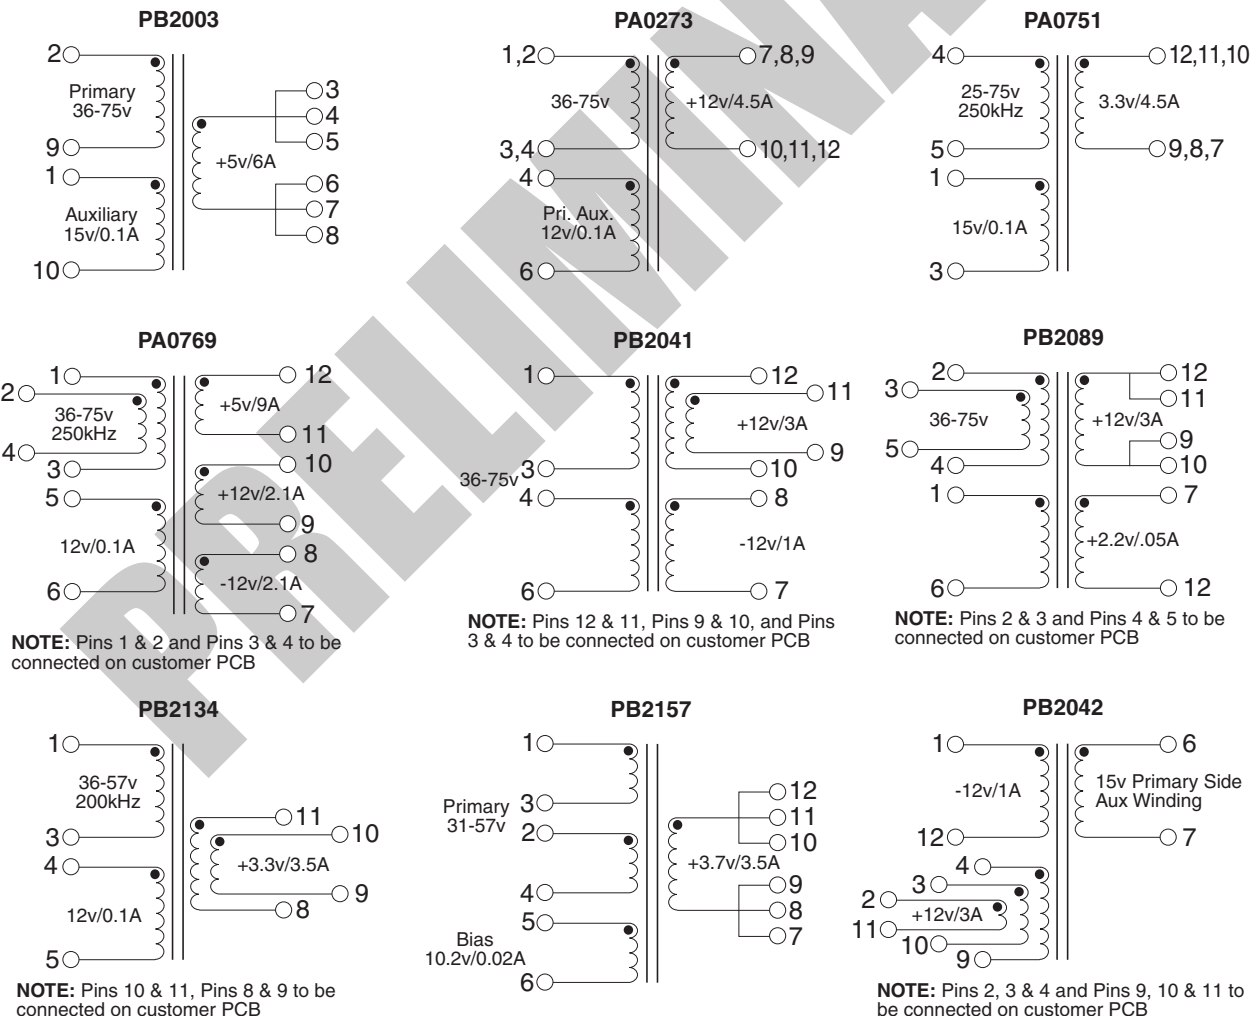

HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS




EFD Platforms - EFD15, EFD20 and EFD25



Pulse
A TECHNITROL COMPANY

Schematics

EFD 25

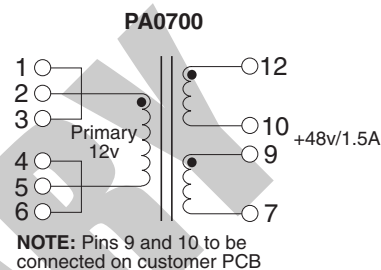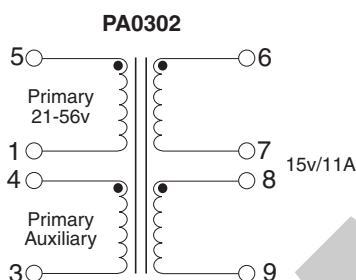

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	9/F, Phase 2, Tai Sang Shatin Warehouse Centre 6 Wong Chuk Yeung Street Fotan, Shatin, Hong Kong TEL: 852 2788 6588 FAX: 852 2776 1055	

This is a "Preliminary" product data sheet. Products mentioned on this data sheet are in development and in the process of being qualified. These products are not fully released nor are they in production. Features, specifications and performance of products offered are subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners. For current information on this product, please contact the Pulse office nearest you and ask for the "Power Applications Engineer."

©2004, Pulse Engineering, Inc. All Rights Reserved.