



.100" [2.54 mm] Female Headers

NUMBER OF ROWS




ONE (1)



TWO (2)

FEATURES

- * 3 amp current rating
- * UL Flammability Rating : 94V-O
- * Insulator : Nylon 6-T.
- * Contact Material : Phosphor Bronze

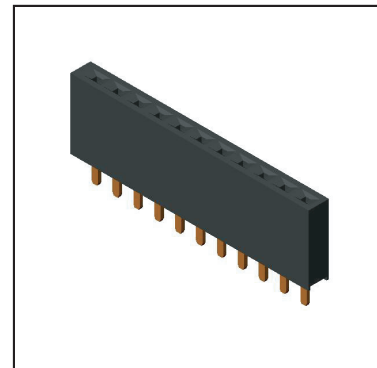


TERMINATION TYPE


P/N CODE	ROWS	TERM	A	B	TAIL
LFB	1	STRAIGHT	.0334 [8.50]	.0094 [2.40]	.0125 [3.20]
	2	STRAIGHT	.0334 [8.50]	.0196 [5.00]	.0125 [3.20]

P/N CODE	ROWS	TERM	A	B	TAIL
LGB	1	RIGHT ANGLE	.334 [8.50]	N / A	.125 [3.20]
LJB	2	RIGHT ANGLE	.196 [5.00]	N / A	.125 [3.20]


P/N CODE	ROWS	TERM	ENTRY	A	B	TAIL
KFX	1	SMT	TOP ENTRY	.279 [7.10]	.098 [2.50]	.165 [4.20]
KFM	2	SMT	TOP ENTRY	.279 [7.10]	.196 [5.00]	.265 [6.75]



STRAIGHT

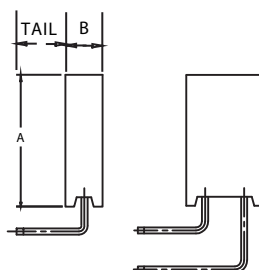

RIGHT ANGLE

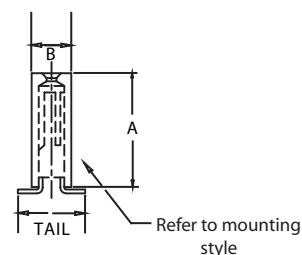


SMT

Mounting Style




No Mounting-
Default Standard (N)

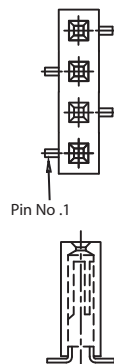


One Row SMT,
Pin1 Left (C)



One Row SMT,
Pin1 Right (D)

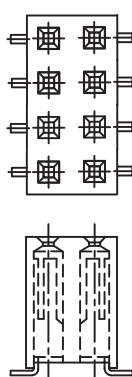

Two Row SMT,
Without guide post(S)

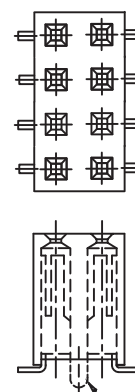

Two Row SMT,
With guide post(P)


.100" [2.54 mm] Female Headers

PART NUMBER CODING

SERIES	PP	P	C	36	1	LFB	N	-M#	MODIFICATIONS (Consult Factory) Omit for Standard
PP = Header, Polyester NP = Header, Nylon 6-T (KFX, KFM TERMINATION)									
CONTACT FINISH Contact	Termination								MOUNTING STYLE N = No Mounting C = SMT, One Row , pin1 Left D = SMT, One Row , pin1 Right P = SMT, 2 row with guide pins S = SMT, 2 row without guide pins
P = Gold Flash T = Tin/Lead	Gold Flash Tin/Lead								TERMINATION TYPE (Opposite Page) LFB= STRAIGHT LGB= 1 ROW RIGHT ANGLE LJB= 2 ROW RIGHT ANGLE KFX= 1 ROW SMT(NP SERIES ONLY) KFM= 2 ROW SMT(NP SERIES ONLY)
CONTACT CENTERS									NUMBER OF ROWS (Opposite Page) 1 = 1 Row 2 = 2 Row
C = .100" [2.54mm]									NUMBER OF POSITIONS 01 Thru 36 (eg. 36 position has 72 Contacts)

DIMENSIONS

Dimensions in [] are in millimeters, all others in inches.

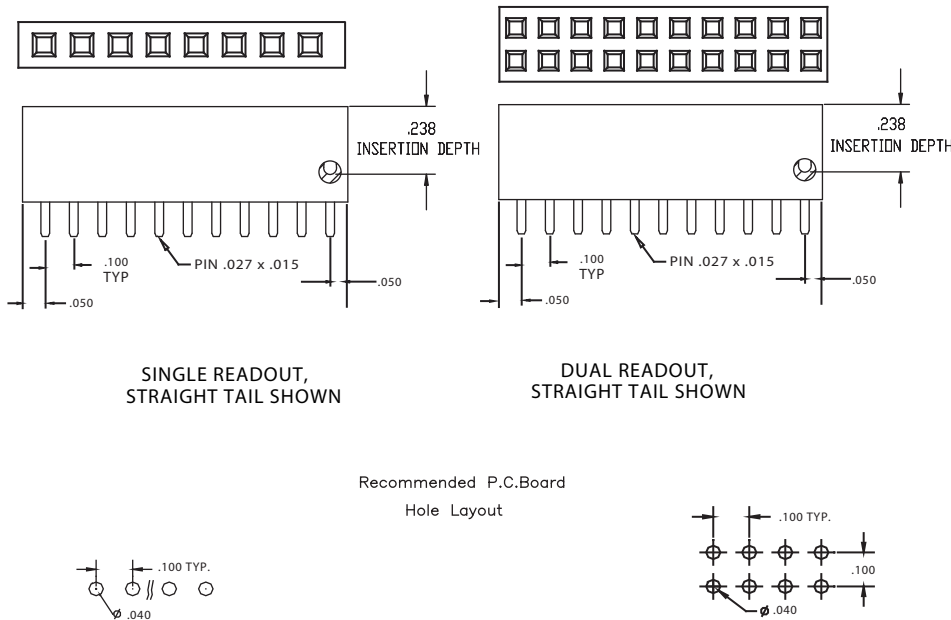

NUMBER OF POSITIONS	Number Of Contacts	
	1 ROW	2 ROW
01	1	2
02	2	4
03	3	6
04	4	8
05	5	10
06	6	12
07	7	14
08	8	16
09	9	18
10	10	20
11	11	22
12	12	24
13	13	26
14	14	28
15	15	30
16	16	32
17	17	34
18	18	36
19	19	38
20	20	40
21	21	42
22	22	44
23	23	46
24	24	48
25	25	50
26	26	52
27	27	54
28	28	56
29	29	58
30	30	60
31	31	62
32	32	64
33	33	66
34	34	68
35	35	70
36	36	72

* For complete part number add readout and termination type from Part Number Coding (e.g. PPPC361LFBN).

SULLINS®

PHONE 760.744.0125

• www.SullinsElectronics.com

• FAX 760.744.6081

75