

SME-BP Series

- Standard Bi-polarized type
- Endurance : 2,000 hours at 85°C
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

SME-BP

Bi-polarized
SME





SPECIFICATIONS

Items	Characteristics										
Category	Temperature Range										
Rated Voltage Range	-40 to +85°C										
Capacitance Tolerance	6.3 to 100V _{dc}										
Leakage Current	±20% (M) (at 20°C, 120Hz)										
Dissipation Factor (tanδ)	I=0.06CV or 10μA, whichever is greater. (at 20°C after 2 minutes)										
	I=0.03CV or 3μA, whichever is greater. (at 20°C after 5 minutes)										
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)										
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	
	tanδ (Max.)	0.24	0.24	0.20	0.20	0.16	0.14	0.12	0.12	0.10	
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)										
Endurance	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	2	2	2	
	Z(-40°C)/Z(+20°C)	10	8	6	4	3	3	3	3	3	
Shelf Life	(at 120Hz)										
	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C, however the polarization shall be reversed every 250 hours.										
	Rated voltage	6.3 to 16V _{dc}					25 to 100V _{dc}				
	Capacitance change	≤±25% of the initial value					≤±20% of the initial value				
	D.F. (tanδ)	≤150% of the initial specified value									
Shelf Life	Leakage current	≤The initial specified value									
	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.										
	Rated voltage	6.3 to 16V _{dc}					25 to 100V _{dc}				
	Capacitance change	≤±25% of the initial value					≤±20% of the initial value				
	D.F. (tanδ)	≤150% of the initial specified value									
Shelf Life	Leakage current	≤The initial specified value									


DIMENSIONS [mm]

- Terminal Code : E

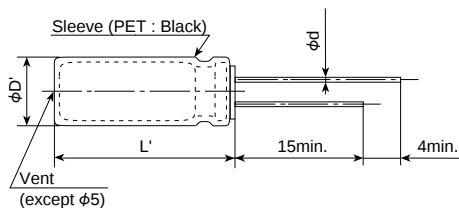

φD	5	6.3	8	10	12.5	16	18
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φD'	φD+0.5max.						
L'	L+1.5max.						

PART NUMBERING SYSTEM

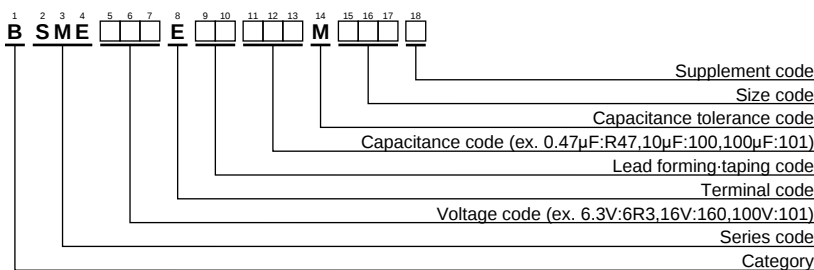

Please refer to "A guide to global code (radial lead type)"

SME-BP Series

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mA _{rms} /85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mA _{rms} /85°C,120Hz)	Part No.
6.3	33	5×11	0.24	64	BSME6R3E□□330ME11D	35	220	12.5×20	0.16	410	BSME350E□□221MK20S
	47	5×11	0.24	76	BSME6R3E□□470ME11D		330	12.5×20	0.16	505	BSME350E□□331MK20S
	100	6.3×11	0.24	125	BSME6R3E□□101MF11D		470	12.5×25	0.16	655	BSME350E□□471MK25S
	220	8×11.5	0.24	215	BSME6R3E□□221MHB5D		1,000	16×31.5	0.16	1,140	BSME350E□□102MLN3S
	330	8×11.5	0.24	265	BSME6R3E□□331MHB5D		0.47	5×11	0.14	11	BSME500E□□47ME11D
	470	10×12.5	0.24	370	BSME6R3E□□471MJC5S	50	1.0	5×11	0.14	17	BSME500E□□1R0ME11D
	1,000	10×20	0.24	650	BSME6R3E□□102MJ20S		2.2	5×11	0.14	25	BSME500E□□2R2ME11D
	2,200	12.5×25	0.26	1,160	BSME6R3E□□222MK25S		3.3	5×11	0.14	27	BSME500E□□3R3ME11D
	3,300	16×25	0.28	1,570	BSME6R3E□□332ML25S		4.7	5×11	0.14	34	BSME500E□□4R7ME11D
	4,700	16×31.5	0.30	2,020	BSME6R3E□□472MLN3S		10	6.3×11	0.14	52	BSME500E□□100MF11D
	6,800	18×35.5	0.34	2,600	BSME6R3E□□682MMP1S		22	8×11.5	0.14	89	BSME500E□□220MHB5D
10	22	5×11	0.24	57	BSME100E□□220ME11D		33	8×11.5	0.14	105	BSME500E□□330MHB5D
	33	5×11	0.24	64	BSME100E□□330ME11D		47	10×12.5	0.14	150	BSME500E□□470MJC5S
	47	5×11	0.24	76	BSME100E□□470ME11D		100	10×20	0.14	265	BSME500E□□101MJ20S
	100	6.3×11	0.24	125	BSME100E□□101MF11D		220	12.5×25	0.14	480	BSME500E□□221MK25S
	220	8×11.5	0.24	215	BSME100E□□221MHB5D		330	16×25	0.14	650	BSME500E□□331ML25S
	330	10×16	0.24	345	BSME100E□□331MJ16S		470	16×31.5	0.14	835	BSME500E□□471MLN3S
	470	10×16	0.24	410	BSME100E□□471MJ16S	63	3.3	5×11	0.12	28	BSME630E□□3R3ME11D
	1,000	12.5×20	0.24	720	BSME100E□□102MK20S		4.7	6.3×11	0.12	34	BSME630E□□4R7MF11D
	2,200	16×25	0.26	1,280	BSME100E□□222ML25S		10	6.3×11	0.12	57	BSME630E□□100MF11D
	3,300	16×31.5	0.28	1,690	BSME100E□□332MLN3S		22	8×11.5	0.12	95	BSME630E□□220MHB5D
	4,700	18×35.5	0.30	2,160	BSME100E□□472MMP1S		33	10×12.5	0.12	135	BSME630E□□330MJC5S
16	10	5×11	0.20	42	BSME160E□□100ME11D		47	10×16	0.12	180	BSME630E□□470MJ16S
	22	5×11	0.20	57	BSME160E□□220ME11D		100	12.5×20	0.12	320	BSME630E□□101MK20S
	33	5×11	0.20	70	BSME160E□□330ME11D		220	16×25	0.12	575	BSME630E□□221ML25S
	47	6.3×11	0.20	95	BSME160E□□470MF11D		330	16×31.5	0.12	655	BSME630E□□331MLN3S
	100	8×11.5	0.20	160	BSME160E□□101MHB5D		470	18×35.5	0.12	965	BSME630E□□471MMP1S
	220	10×12.5	0.20	275	BSME160E□□221MJC5S	80	2.2	5×11	0.12	29	BSME800E□□2R2ME11D
	330	10×16	0.20	375	BSME160E□□331MJ16S		3.3	6.3×11	0.12	39	BSME800E□□3R3MF11D
	470	10×20	0.20	485	BSME160E□□471MJ20S		4.7	6.3×11	0.12	47	BSME800E□□4R7MF11D
	1,000	12.5×25	0.20	855	BSME160E□□102MK25S		10	8×11.5	0.12	65	BSME800E□□100MHB5D
	2,200	16×31.5	0.22	1,510	BSME160E□□222MLN3S		22	10×16	0.12	125	BSME800E□□220MJ16S
	3,300	18×35.5	0.24	1,980	BSME160E□□332MMP1S		33	10×16	0.12	150	BSME800E□□330MJ16S
25	10	5×11	0.20	42	BSME250E□□100ME11D		47	10×20	0.12	195	BSME800E□□470MJ20S
	22	6.3×11	0.20	65	BSME250E□□220MF11D		100	12.5×25	0.12	350	BSME800E□□101MK25S
	33	6.3×11	0.20	80	BSME250E□□330MF11D		220	16×31.5	0.12	615	BSME800E□□221MLN3S
	47	6.3×11	0.20	95	BSME250E□□470MF11D		330	18×35.5	0.12	755	BSME800E□□331MMP1S
	100	8×11.5	0.20	160	BSME250E□□101MHB5D	100	0.47	5×11	0.10	14	BSME101E□□47ME11D
	220	10×16	0.20	305	BSME250E□□221MJ16S		1.0	5×11	0.10	21	BSME101E□□1R0ME11D
	330	12.5×20	0.20	450	BSME250E□□331MK20S		2.2	6.3×11	0.10	34	BSME101E□□2R2MF11D
	470	12.5×20	0.20	540	BSME250E□□471MK20S		3.3	6.3×11	0.10	39	BSME101E□□3R3MF11D
	1,000	16×25	0.20	950	BSME250E□□102ML25S		4.7	6.3×11	0.10	47	BSME101E□□4R7MF11D
	2,200	18×35.5	0.22	1,620	BSME250E□□222MMP1S		10	8×11.5	0.10	71	BSME101E□□100MHB5D
35	4.7	5×11	0.16	34	BSME350E□□4R7ME11D		22	10×16	0.10	135	BSME101E□□220MJ16S
	10	5×11	0.16	43	BSME350E□□100ME11D		33	12.5×20	0.10	220	BSME101E□□330MK20S
	22	6.3×11	0.16	73	BSME350E□□220MF11D		47	12.5×20	0.10	240	BSME101E□□470MK20S
	33	8×11.5	0.16	100	BSME350E□□330MHB5D		100	16×25	0.10	425	BSME101E□□101ML25S
	47	8×11.5	0.16	120	BSME350E□□470MHB5D		220	18×35.5	0.10	720	BSME101E□□221MMP1S
	100	10×16	0.16	230	BSME350E□□101MJ16S						

□□ : Fill with appropriate lead forming or taping code.