

# Chip Resistor Arrays

## Features


Chip resistor arrays have been designed to fit in wherever greater density is required. Available in banks of 2, 4 or 8 resistors in one package. Suitable for flow and reflow soldering.

## Dimensions

Unit: mm

Series	L	W	T	P (REF.)	Q1	Q2	C	Terminal Type
CRN10	0.5 X n ± 0.05	1.0 ± 0.05	0.35 ± 0.05	0.5	0.33 ± 0.1	0.33 ± 0.1	0.25 ± 0.05	Convex/Concave
CRN16	0.8 X n ± 0.1	1.6 ± 0.1	0.5 ± 0.1	0.8	0.40 ± 0.15	0.60 ± 0.15	0.25 ± 0.15	Convex/Concave
CRN 31-8	6.4 ± 0.2	3.1 ± 0.2	0.6 ± 0.1	1.27	1.0 ± 0.2	NA	0.6 ± 0.2	Concave
CRN 32-4	5.08 ± 0.2	3.1 ± 0.2	0.55 ± 0.1	1.27	0.8 ± 0.2	1.10 ± 0.15	0.30 ± 0.20	Convex/Concave
CRN 34-8	6.4 ± 0.2	3.1 ± 0.2	0.6 ± 0.1	1.27	1.0 ± 0.2	NA	0.6 ± 0.2	Concave
CRN 35-8	3.2 ± 0.2	1.6 ± 0.2	0.6 ± 0.1	0.64	0.34 ± 0.15	0.49 ± 0.15	0.2+0.2-0.1	Convex

n = number of resistive elements.

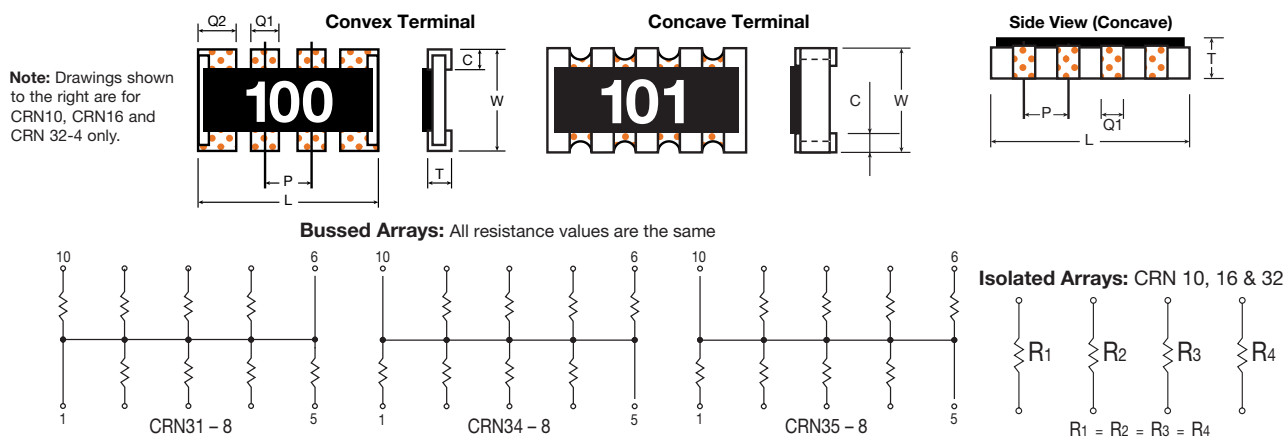

## Rating


Series	Rated Power at 70°C	Maximum Working Voltage	Maximum Overload Voltage	TCR	* Resistance Range	Tolerance	Operating Temperature Range	Quantity per Reel
* CRN10	.063W	25V	50V	±200PPM/°C	0,1Ω ~ 1MΩ	F, J	-55°C ~ 150°C	10,000
**CRN16	.063W	50V	100V	±200PPM/°C	0,1Ω ~ 1MΩ	F, J	-55°C ~ 150°C	5,000
CRN31-8	.063W	100V	200V	±200PPM/°C	22Ω ~ 470K	F, J	-55°C ~ 150°C	4,000
CRN32-4	.125W	200V	400V	±200PPM/°C	0,10Ω ~ 1MΩ	F, J	-55°C ~ 150°C	4,000
CRN34-8	.063W	100V	200V	±200PPM/°C	22Ω ~ 470K	F, J	-55°C ~ 150°C	4,000
CRN35-8	.031W	25V	50V	±250PPM/°C	10Ω ~ 100K	F, J	-55°C ~ 150°C	5,000

\* Only available with 2 or 4 resistors. Concave in 4 element only.

\*\* The CRN16 Series is available with 8 resistors. Minimum order quantities may apply.

NOTE: Values under 10Ω may be available. Please consult your sales representative for availability.


## How To Order

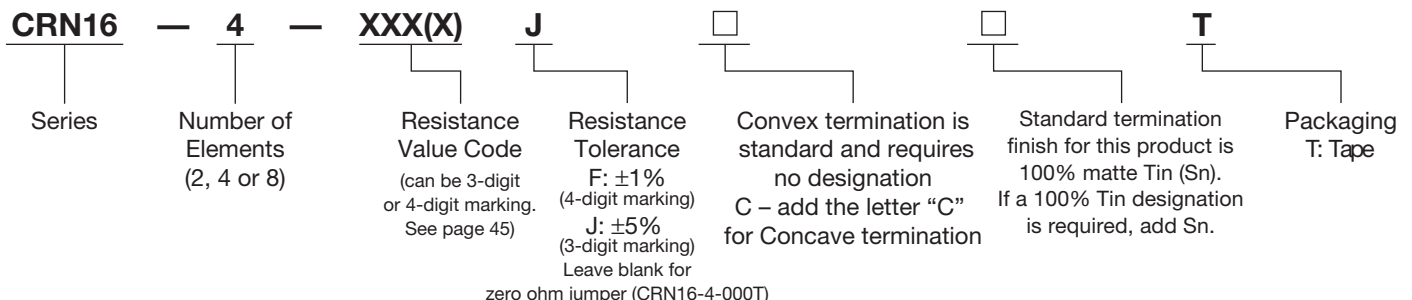

All components in this section are RoHS compliant per the EU directives and definitions.

5900 Shepherd Mountain Cove • Austin, TX 78730  
 Phone: 512 / 794-0081 • Fax: 512 / 794-0087 • Toll Free: 800 / 950-8365  
 e-mail: sales@venkel.com • www.venkel.com

## DERATING CURVE

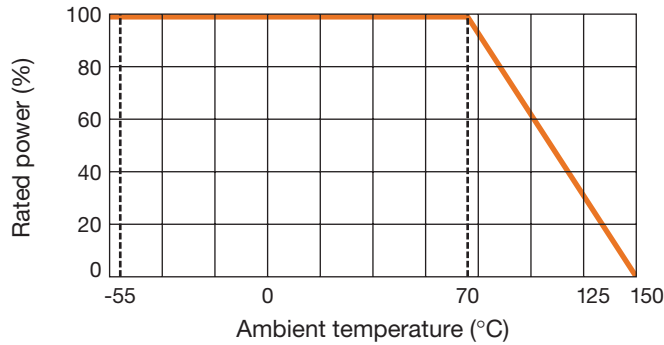


The resistors shall have a power rating based on continuous full-load operation at an ambient temperature of 70°C. For operation at ambient temperature in excess of 70°C, the load shall be derated in accordance with figure of Derating Curve.

## Characteristics


Description	Requirements	Test method JIS C 5202
<b>Resistance Value</b>	Within specified tolerance	
<b>Resistance Temperature Coefficient</b>	See Rating table	Measuring temperature +25°C/ -55°C/ +20°C/ +125°C
<b>Short time Overload</b>	Within ± (1% +0.05Ω) No major visible damage	2.5 times rated voltage 5 seconds
<b>Insulation Resistance</b>	At least 1,000 MΩ	CRN10: 50Vdc, CRN16/35: 100Vdc 1 minute CRN31/32: 500Vdc 1 minute
<b>Terminal Strength</b>	Within ± (1% +0.05Ω) No mechanical damage to the resistor body	Install a sample on the board and bend the board 3/45mm for 10 seconds
<b>Resistance to Vibration</b>	Within ± (1% +0.05Ω) No mechanical damage to the resistor body	10Hz → 55Hz → 10Hz 3 directions (X, Y, Z) 2 hours each Amplitude 1.5mm
<b>Solder Heat Resistance</b>	Within ± (1% +0.05Ω) No major visible damage	Dip into 260°C solder bath for 10 seconds
<b>Solderability</b>	At least 95% of the terminal surface must be covered by new solder	After dipping into flux, dip into 235°C solder bath for 2 seconds
<b>Temperature Cycle</b>	Within ± (1% +0.05Ω) No major visible damage	Cycle between -55°C and +150°C for 5 cycles
<b>Load Life in Moisture</b>	Within ± (3% +0.1Ω) No major visible damage	Rated voltage 1.5 hours "ON" 0.5 hours "OFF" 40°C, 95% RH 1,000 hours
<b>Load Life</b>	Within ± (3% +0.1Ω) No major visible damage	Rated voltage 1.5 hours "ON" 0.5 hours "OFF" 70°C 1,000 hours

## Construction

### CONVEX

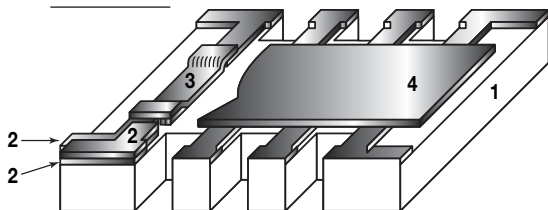

- 1 – High Purity Alumina Substrate
- 2 – Termination
  - 1) Ag/Pd 1st Conductor
  - 2) Ni 2nd Conductor
  - 3) 100% matte Tin (Sn) 3rd Conductor
- 3 – RuO<sub>2</sub> Resistor Material
- 4 – Glass Protective Coating

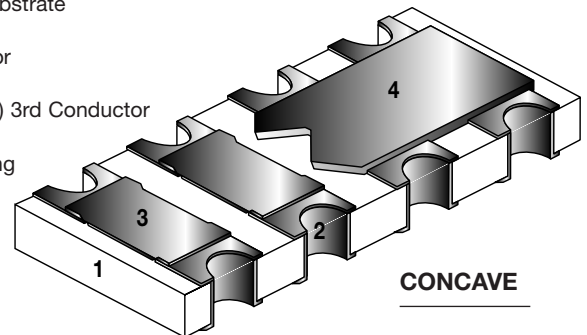

### CONCAVE