


High Frequency, Surface Mount, Laser Spiral Coated Inductors

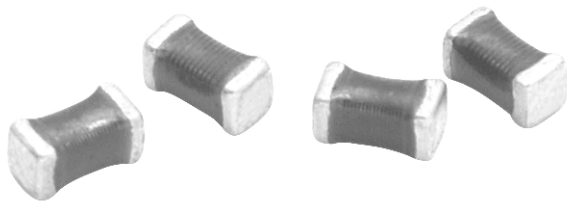

ELECTRICAL SPECIFICATIONS

Inductance Range: 1.0 nH to 220 nH

Inductance Tolerance: ± 0.3 nH for 1.0 - 3.3 nH
 $\pm 5\%$ for 3.9 nH to 220 nH

Operating Temperature: - 40 °C to + 100 °C Core

Material: Ceramic

FEATURES

- Very small in size
- High self-resonant frequency values
- High Q values relative to size at higher frequencies
- Coated coil provides protection and moisture resistance
- Compatible with vapor phase and infrared reflow soldering
- Tape and reel packaging for automatic handling, 3000/reel, EIA-481
- L and Q value not affected by mounting orientation
- 100 % lead (Pb)-free and RoHS compliant



RoHS
COMPLIANT

TEST EQUIPMENT


- Inductance and Q measured on HP4291B
- SRF measured on HP8753E
- DCR measured on HP4338B

STANDARD ELECTRICAL SPECIFICATIONS

INDUCTANCE (nH)	TOLERANCE	TEST FREQ. L (MHz)	Q MINIMUM	TEST FREQ. Q (MHz)	SELF-RESONANT FREQ. MIN. (MHz)	DCR MAXIMUM (Ohms)	RATED DC CURRENT * (mA)
1.0	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.06	500
1.2	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.06	500
1.5	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.07	500
1.8	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.08	500
2.2	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.09	500
2.7	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.10	500
3.3	± 0.3 nH, 0.2 nH	100	30	1000	5500	0.12	500
3.9	$\pm 5\%$	100	30	1000	5500	0.15	450
4.7	$\pm 5\%$	100	30	1000	4800	0.17	450
5.6	$\pm 5\%$	100	30	1000	4600	0.18	430
6.8	$\pm 5\%$	100	30	1000	3550	0.20	430
8.2	$\pm 5\%$	100	30	1000	3500	0.28	400
10	$\pm 5\%$, 2 %	100	30	500	2800	0.32	400
12	$\pm 5\%$, 2 %	100	30	500	2800	0.35	400
15	$\pm 5\%$, 2 %	100	30	500	2500	0.41	350
18	$\pm 5\%$, 2 %	100	30	500	2300	0.45	350
22	$\pm 5\%$, 2 %	100	30	500	2000	0.50	300
27	$\pm 5\%$, 2 %	100	30	500	2000	0.55	300
33	$\pm 5\%$, 2 %	100	30	500	1800	0.60	300
39	$\pm 5\%$, 2 %	100	30	500	1800	0.80	300
47	$\pm 5\%$, 2 %	100	30	500	1800	0.95	250
56	$\pm 5\%$, 2 %	100	30	500	1800	1.20	250
68	$\pm 5\%$, 2 %	100	30	500	1500	1.30	250
82	$\pm 5\%$, 2 %	100	30	500	1500	1.50	250
100	$\pm 5\%$, 2 %	100	26	500	1300	1.80	200
120	$\pm 5\%$, 2 %	100	26	500	1200	3.00	130
150	$\pm 5\%$, 2 %	100	26	500	1100	4.50	100
180	$\pm 5\%$, 2 %	100	20	500	1000	6.5	80
220	$\pm 5\%$, 2 %	100	20	500	900	7.5	70

*Value obtained when current flows and the temperature has risen 15 °C

DIMENSIONS in inches [millimeters]

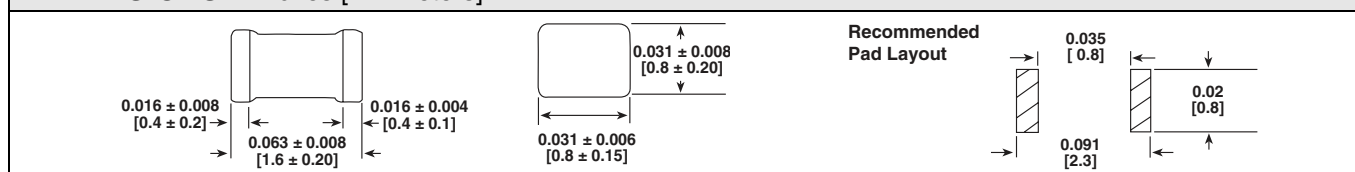

DESCRIPTION

IMC-0603	10 nH	$\pm 5\%$	ER	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

GLOBAL PART NUMBER												
I	M	C	0	6	0	3	E	R	1	0	N	J
PRODUCT FAMILY			SIZE				PACKAGE CODE		INDUCTANCE VALUE			TOL.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.