
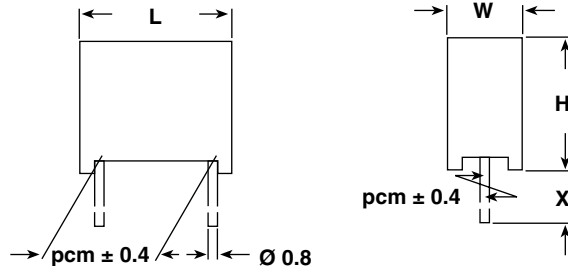


AC-Capacitors, Suppression Capacitors Class X2 AC 275 V (MKT)

Dimensions in mm

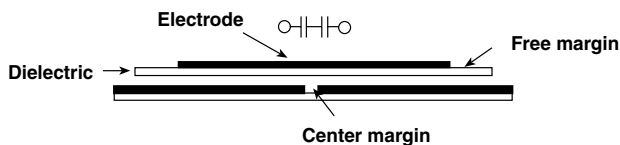

LEAD LENGTH X (mm)	ORDERING CODE**
4 ⁻¹	F1772-...-2004
6 ⁻¹	F1772-...-2000
15 ⁻¹	F1772-...-2015
30 ⁺⁵	F1772-...-2030


MAXIMUM PULSE RISE TIME: (d_U/d_t) in V/μs

RATED VOLTAGE	PITCH (mm)			
	15.0	22.5	27.5	37.5
AC 275 V	200	150	100	100

RATED VOLTAGE:

AC 275 V, 50/60 Hz

PERMISSIBLE DC VOLTAGE:

DC 630 V

TERMINALS:

Radial tinned copper wire

COATING:

Plastic case, epoxy resin sealed, flame retardant UL 94V-0

CLIMATIC TESTING CLASS ACC.TO EN 60068-1:

40/100/56

CAPACITANCE RANGE:

E12 series 0.01 μFX2 - 2.2 μFX2
preferred values acc. to E6

FEATURES:

Product is completely lead (Pb)-free

Product is RoHS compliant

CAPACITANCE TOLERANCE:

Standard: ± 10 %

DISSIPATION FACTOR TANδ:

< 1 % measured at 1 KHz

INSULATION RESISTANCE: FOR C ≤ 0.33 μF:

30 GΩ average value

15 GΩ minimum value

TIME CONSTANT FOR C > 0.33 μF:

10 000 sec. average value

5000 sec. minimum value

TEST VOLTAGE:

(Electrode/electrode): DC 2150 V/2 sec.

REFERENCE STANDARDS:

EN 132 400, 1994

EN 60068-1

IEC 60384-14/2, 1993

UL 1283

UL 1414

CSA 22.2 No. 8-M 86

CSA 22.2 No. 1-M 90

DIELECTRIC:

Polyester film

ELECTRODES:

Metal evaporated


CONSTRUCTION:

Metallized film capacitor

Internal series connection

Between interconnected terminations and case (foil method):

AC 2500 V for 2 sec. at 25 °C.

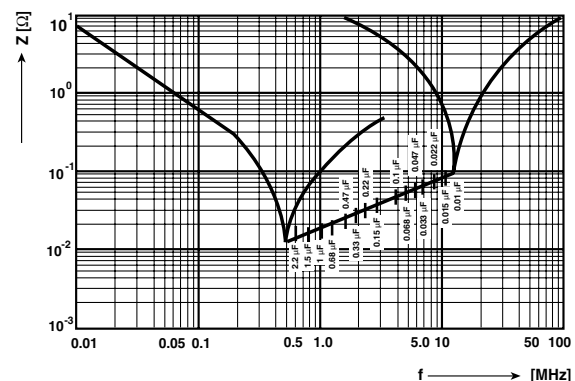
Impedance (Z) as a function of frequency (f) at $T_a = 20\text{ °C}$
(average). Measurement with lead length 6 mm.

Vishay Roederstein AC-Capacitors, Suppression Capacitors Class X2 AC 275 V (MKT)

APPROVALS

COUNTRY	SPECIFICATION	ELECTRICAL VALUES	APPROVAL REFERENCE	APPROVAL MARK
U.S.A. (for AC 250 V)	UL 1283 UL 1414	0.01 - 2.2 μ FX 0.01 - 1.0 μ FX	E 76297 E 100682	
Canada (for AC 250 V)	C 22.2 No. 8-M 1986 C 22.2 No. 1-M 1994	0.01 - 2.2 μ FX 0.01 - 0.82 μ FX	LR 64546 LR 64546-8	
CB TEST-CERTIFICATE (for AC 275 V)		0.01 - 2.2 μ FX2	DE 1-8790	
Germany	EN 132 400; 1999-06 IEC 60384-14, 2nd edition; 1993-07, Table II + A1: 1995-06	0.01 - 2.2 μ FX2	40005079	
This approval mark together with the CB-Certificate replace all national approval marks of the following countries (they have already signed the CB-Agreement):				
Austria	Belgium	Denmark	Finland	Sweden
France	Germany	Ireland	Italy	Switzerland
Netherlands	Israel	Portugal	Spain	Great Britain
Japan	Norway	China	Poland	Czech. Republic
Singapore	Rep. of Korea	Hungary	Iceland	Slovenia

CAPACITANCE	TOL. (%)	PITCH (mm)	BOX NO.	DIMENSIONS W x H x L (mm) (+ 0.2/- 0.4 mm)	WEIGHT LEAD LENGTH 6 ⁻¹ mm (g)	QUANTITY PACKAGE LEAD LENGTH < = 6 ⁻¹ mm (pcs)**	ORDERING CODE***
0.01 μ FX2	± 10	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-310-20 ..
0.012 μ FX2	± 10	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-312-20 ..
0.015 μ FX2	± 10	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-315-20 ..
0.018 μ FX2	± 10	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-318-20 ..
0.022 μ FX2	± 10	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-322-20 ..
0.027 μ FX2	± 10	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-327-20 ..
0.033 μ FX2	± 10	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-333-20 ..
0.039 μ FX2	± 10	15.0	06	6.3 x 12.3 x 17.8	2.0	500	F1772-339-20 ..
0.047 μ FX2	± 10	15.0	06	6.3 x 12.3 x 17.8	2.0	500	F1772-347-20 ..
0.056 μ FX2	± 10	15.0	06	6.3 x 12.3 x 17.8	2.0	500	F1772-356-20 ..
0.068 μ FX2	± 10	15.0	07	7.3 x 13.3 x 17.8	2.4	450	F1772-368-20 ..
0.082 μ FX2	± 10	15.0	08	8.3 x 14.3 x 17.8	2.7	325	F1772-382-20 ..
0.1 μ FX2	± 10	15.0*	08	8.3 x 14.3 x 17.8	2.7	325	F1772-410-20 ..
0.12 μ FX2	± 10	15.0*	08	8.3 x 14.3 x 17.8	2.7	325	F1772-412-20 ..
0.15 μ FX2	± 10	22.5*	11	7.3 x 15.3 x 26.3	4.1	235	F1772-415-20 ..
0.18 μ FX2	± 10	22.5*	11	7.3 x 15.3 x 26.3	4.1	235	F1772-418-20 ..
0.22 μ FX2	± 10	22.5*	12	8.3 x 16.3 x 26.3	4.6	200	F1772-422-20 ..
0.27 μ FX2	± 10	22.5*	13	10.3 x 18.3 x 26.3	6.7	170	F1772-427-20 ..
0.33 μ FX2	± 10	22.5*	13	10.3 x 18.3 x 26.3	6.7	170	F1772-433-20 ..
0.39 μ FX2	± 10	27.5*	14	11.0 x 20.3 x 31.3	9.1	125	F1772-439-20 ..
0.47 μ FX2	± 10	27.5*	14	11.0 x 20.3 x 31.3	9.1	125	F1772-447-20 ..
0.56 μ FX2	± 10	27.5*	14	11.0 x 20.3 x 31.3	9.1	125	F1772-456-20 ..
0.68 μ FX2	± 10	27.5*	15	13.0 x 23.3 x 31.3	12.9	110	F1772-468-20 ..
0.82 μ FX2	± 10	27.5*	15	13.0 x 23.3 x 31.3	15.0	100	F1772-482-20 ..
1.0 μ FX2	± 10	27.5*	18	14.5 x 24.3 x 31.3	15.0	100	F1772-510-20 ..
1.2 μ FX2	± 10	37.5*	16	14.0 x 24.3 x 41.3	18.9	80	F1772-512-20 ..
1.5 μ FX2	± 10	37.5*	19	15.5 x 28.3 x 41.3	18.9	80	F1772-515-20 ..
1.8 μ FX2	± 10	37.5*	19	15.5 x 28.3 x 41.3	24.0	70	F1772-518-20 ..
2.2 μ FX2	± 10	37.5*	20	17.8 x 32.3 x 41.3	31.6	60	F1772-522-20 ..

Preferred values in bold print.

Inbuilt discharging resistor on request (with larger case dimensions).

* Different pitch on request.

** Further information about packaging quantities with different lead length and/or taped versions see Document No 27608 (Packing Quantities)
Use Box No as reference

*** These capacitors can be delivered on continuous tape and reel - see page 12/13 (Document Number 27622).

The ordering code is F1772-...-2900 at H = 16.5 mm, F1772-...-2901 at H = 18.5 mm.

**APPLICATION NOTES**

- For X2 electromagnetic interference suppression in **across the line applications** (50/60 Hz) with a maximum mains voltage of 275 V (AC).
- These capacitors are not intended for continuous pulse applications. For these situations, capacitors of the AC and pulse programs must be used.
- These capacitors can be used for series impedance application in case safety approvals are requested.
- The maximum ambient temperature must not exceed 100 °C.
- Rated voltage pulse slope:
If the pulse voltage is lower than the rated voltage, the values of the specific reference data can be multiplied by 385 V (DC) and divided by the applied voltage.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.