DATA SHEET

SMD beads EMI-suppression products

Supersedes data of February 2002

2004 Sep 01



SMD beads

SMD BEADS FOR EMI SUPPRESSION

General data

ITEM	SPECIFICATION
Strip material	copper (Cu), tin-lead (SnPb) plated, lead-free (Sn) available on request.
Solderability	"IEC 60068-2-58", Part 2, Test Ta, method 1
Taping method	"IEC 60286-3", "EIA 481-1" and "EIA 481-2"


Grades, parameters and type numbers


GRADE	$ \mathbf{Z}_{typ} ^{(1)}$	at f	TYPE NUMBER			
GRADE	(Ω)	(MHz)	TYPE NUMBER			
BDS 3/1.8/5.3; mass ≈0.1 g ⁽²⁾						
3S1	28	10	BDS 3/1.8/5.3-3S1			
	33	25				
	25	100				
4S2	25	25	BDS 3/1.8/5.3-4S2			
	38	100				
	45	300				
BDS 3/3/4.6;	mass ≈0.1	15 g ⁽²⁾				
3S1	25	3	BDS3/3/4.6-3S1			
	45	10				
	35	25				
4S2	30	25	BDS3/3/4.6-4S2			
	50	100				
	55	300				
BDS 3/3/8.9;	mass ≈0.3	3 g (3)				
3S1	55	3	BDS 3/3/8.9-3S1			
	80	10				
	55	25				
4S2	65	25	BDS 3/3/8.9-4S2			
	100	100				
	110	300				
BDS 4.6/3/8.9; mass ≈0.5 g ⁽³⁾						
4S2	65	25	BDS 4.6/3/8.9-4S2			
	100	100				


Note


- 1. Typical values, $|Z|_{min}$ is -20%.
- 2. DC resistance $< 0.6 \text{ m}\Omega$.
- 3. DC resistance <1.0 $m\Omega$

Mechanical data

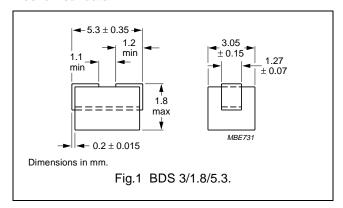

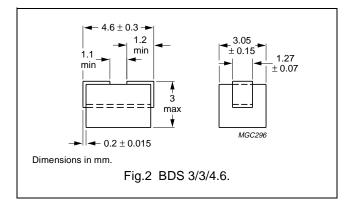

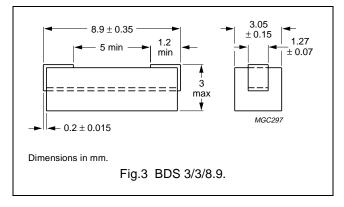

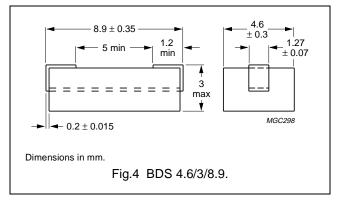

SMD beads

RECOMMENDED DIMENSIONS OF SOLDER LANDS

Table 1 Reflow soldering

SIZE	DIMENSIONS (mm)				
SIZE	Α	В	С	D	
BDS 3/1.8/5.3	2.8	7.2	2.2	3.3	
BDS 3/3/4.6	2.8	6.4	1.8	3.3	
BDS 3/3/8.9	7.0	10.8	1.9	3.3	
BDS 4.6/3/8.9	7.0	10.8	1.9	3.3	


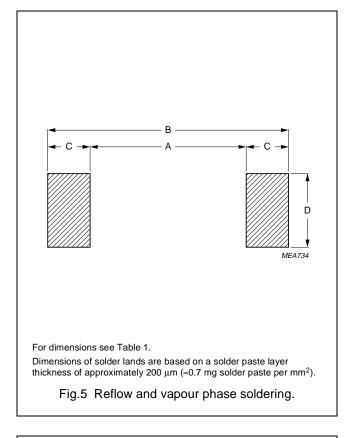


Table 2 Wave soldering


SIZE	DIMENSIONS (mm)				
SIZE	Α	В	С	D	Е
BDS 3/1.8/5.3	2.0	7.2	2.6	3.0	0.8
BDS 3/3/4.6	2.0	6.4	2.2	3.0	0.8
BDS 3/3/8.9	6.0	12.2	3.1	3.0	2.5
BDS 4.6/3/8.9	6.0	12.2	3.1	3.0	2.5

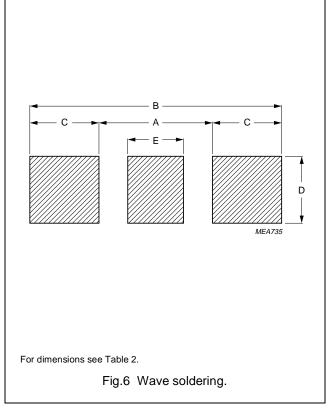


2004 Sep 01 3

SMD beads

Soldering profiles

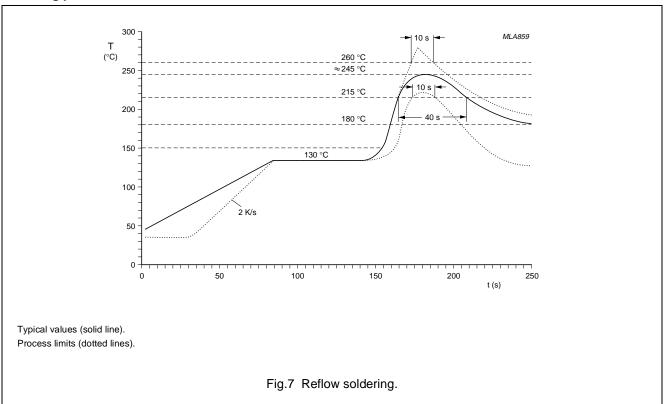

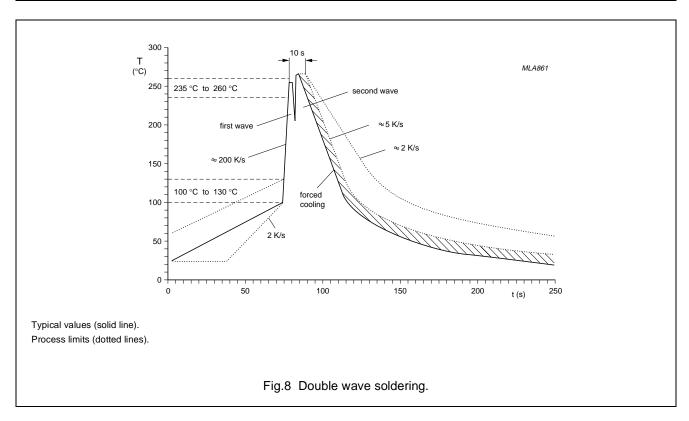

SMD beads

BLISTER TAPE AND REEL DIMENSIONS

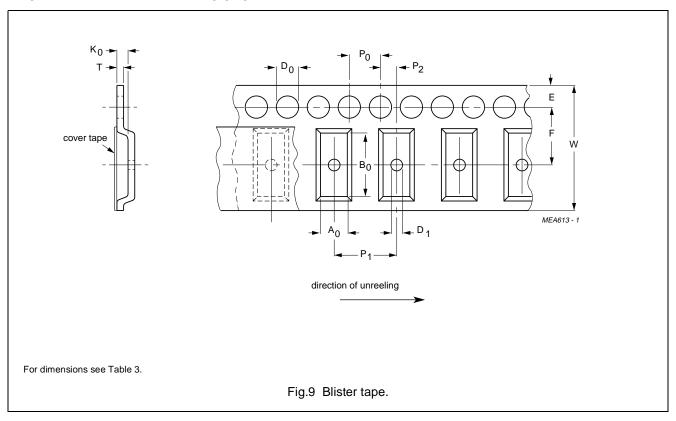


 Table 3
 Physical dimensions of blister tape; see Fig.9

CIZE		DIMENSIO	ONS (mm)	
SIZE	BDS3/1.8/5.3	BDS3/3/4.6	BDS3/3/8.9	BDS4.6/3/8.9
A ₀	3.25 ±0.1	3.45 ±0.1	3.45 ±0.1	5.1 ±0.1
B ₀	5.85 ±0.1	5.1 ±0.1	9.4 ±0.1	9.4 ±0.1
K ₀	2.0 ±0.1	3.1 ±0.1	3.1 ±0.1	3.1 ±0.1
Т	0.3 ±0.05	0.25 ±10%	0.35 ±0.05	0.3 ±0.05
W	12.0 ±0.3	12.0 ±0.3	16.0 ±0.3	16.0 ±0.3
Е	1.75 ±0.1	1.75 ±0.1	1.75 ±0.1	1.75 ±0.1
F	5.5 ±0.05	5.5 ±0.05	7.5 ±0.1	7.5 ±0.1
D_0	1.5 +0.1	1.5 +0.1	1.5 +0.1	1.5 +0.1
D ₁	≥1.5	≥1.5	≥1.5	≥1.5
P ₀	4.0 ±0.1	4.0 ±0.1	4.0 ±0.1	4.0 ±0.1
P ₁	8.0 ±0.1	8.0 ±0.1	8.0 ±0.1	8.0 ±0.1
P ₂	2.0 ±0.1	2.0 ±0.05	2.0 ±0.1	2.0 ±0.1

2004 Sep 01 5

SMD beads

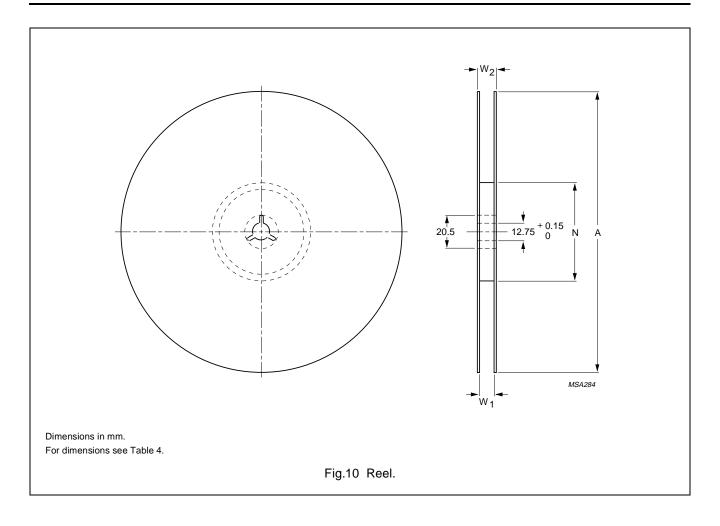


Table 4 Reel dimensions; see Fig.10

SIZE		DIMENSIO		
SIZE	Α	N	W_1	W ₂
12	330	100 ±5	12.4	≤16.4
16	330	100 ±5	16.4	≤20.4

6

2004 Sep 01

SMD beads

DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
Prototype	prot	These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in	des	These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support	sup	These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.

2004 Sep 01 7