

International
IR Rectifier
 SCHOTTKY RECTIFIER
 HIGH EFFICIENCY SERIES

PD-20346E

22CGQ045
 JANS1N6660CCT1
 JANTX1N6660CCT1
 JANTXV1N6660CCT1

30A, 45V

Ref: MIL-PRF-19500/608

Major Ratings and Characteristics


Characteristics	1N6660CCT1	Units
$I_{F(AV)}$	30	A
V_{RRM} (Per Leg)	45	V
I_{FSM} @ $t_p = 8.3\text{ms}$ half-sine (Per Leg)	300	A
V_F @ 20Apk, $T_J = 125^\circ\text{C}$ (Per Leg)	0.70	V
T_J, T_{stg} Operating and storage	-65 to 150	$^\circ\text{C}$

Description/Features


The 1N6660CCT1 center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of high reliability environments. It is packaged in the hermetic isolated TO-254AA package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source controlled drawings to TX, TXV and S levels.

- Hermetically Sealed
- Center Tap
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long Term Reliability
- Electrically Isolated

CASE STYLE

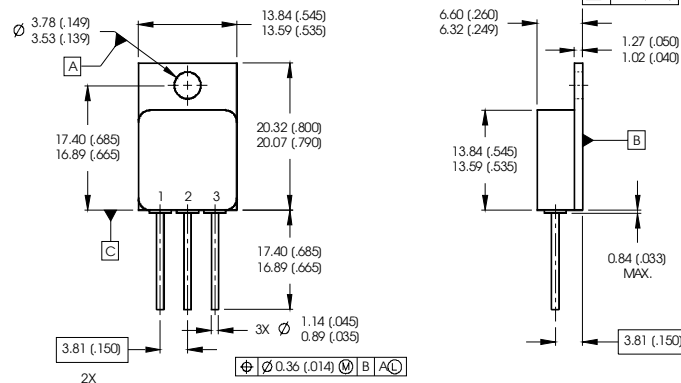

- NOTES:
1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
 2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
 3. CONTROLLING DIMENSION: INCH.
 4. CONFORMS TO JEDEC OUTLINE TO-254AA.



Case Outline and Dimensions - TO-254AA

Voltage Ratings

Part number	1N6660CCT1
V _R Max. DC Reverse Voltage (V) (Per Leg)	45
V _{RWM} Max. Working Peak Reverse Voltage (V) (Per Leg)	

Absolute Maximum Ratings

Parameters	Limits	Units	Conditions
I _{F(AV)} Max. Average Forward Current See Fig. 5	30	A	50% duty cycle @ T _C = 118°C, rectangular waveform
I _{FSM} Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg)	300	A	@ t _p = 8.3 ms half-sine

Electrical Specifications

Parameters	Limits	Units	Conditions
V _{FM} Max. Forward Voltage Drop (Per Leg) ①	0.80	V	@ 15A T _J = -55°C
	0.55	V	@ 5.0A
	0.75	V	@ 15A T _J = 25°C See Fig. 1
	1.0	V	@ 30A
I _{RM} Max. Reverse Leakage Current (Per Leg) See Fig. 2 ①	1.0	mA	T _J = 25°C
	40	mA	T _J = 125°C V _R = rated V _R
C _T Max. Junction Capacitance (Per Leg)	2000	pF	V _R = 5V _{DC} (1MHz, 25°C)
L _S Typical Series Inductance (Per Leg)	6.7	nH	Measured from anode lead to cathode lead 6mm (0.025 in.) from package

Thermal-Mechanical Specifications

Parameters	Limits	Units	Conditions
T _J Max. Junction Temperature Range	-65 to 125	°C	
T _{stg} Max. Storage Temperature Range	-65 to 150	°C	
R _{thJC} Max. Thermal Resistance, Junction to Case (Per Leg)	1.65	°C/W	DC operation See Fig. 4
R _{thJC} Max. Thermal Resistance, Junction to Case (Per Package)	0.85	°C/W	DC operation
wt Weight (Typical)	9.3	g	
Die Size	150X150	mils	
Case Style	TO-254AA		

① Pulse Width < 300μs, Duty Cycle < 2%

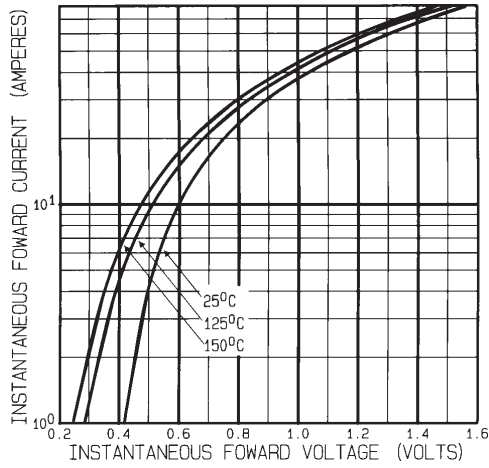


Fig. 1 - Max. Forward Voltage Drop Characteristics
(Per Leg)

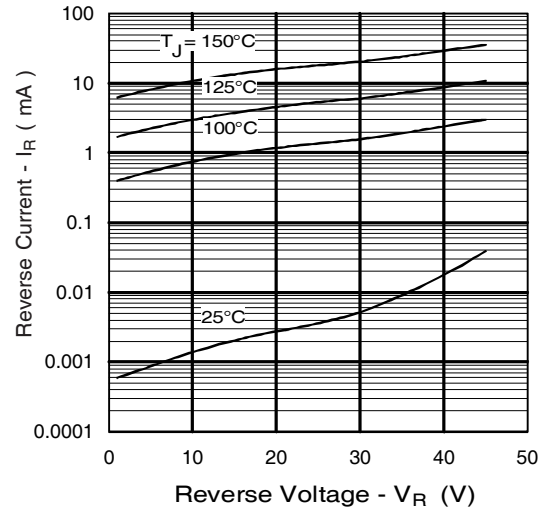


Fig. 2 - Typical Values of Reverse Current
Vs. Reverse Voltage (Per Leg)

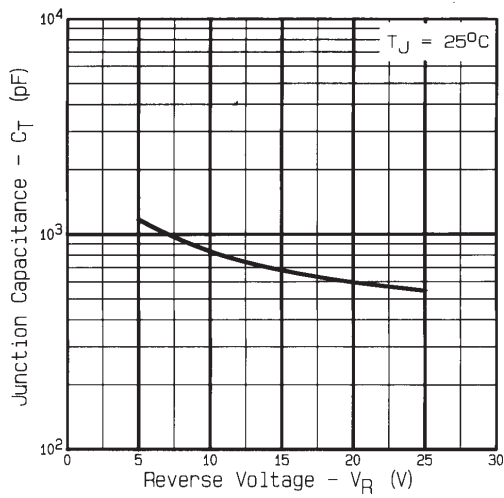


Fig. 3 - Typical Junction Capacitance Vs.
Reverse Voltage (Per Leg)

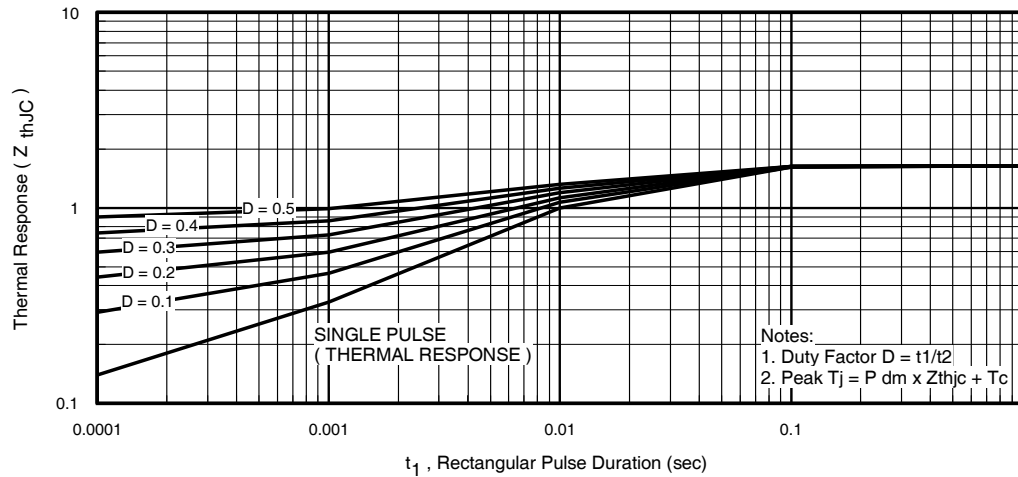
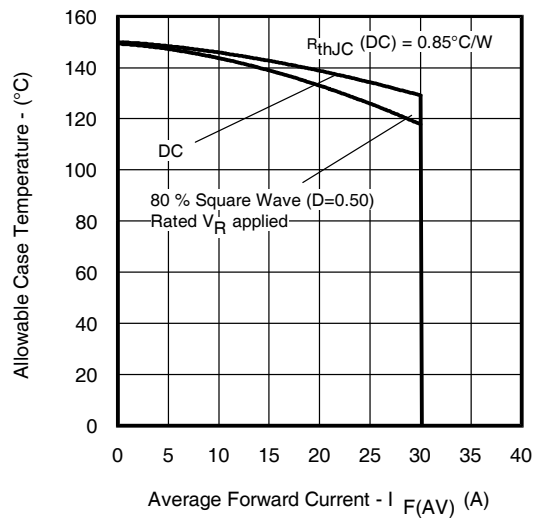
Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current